

# LED Step Light

IP65

120V-277V

LED LIGHTING SYSTEM

Series LSL



LED Step Light is a 120-277 volt, low profile recessed lighting system with 5 distinctive face plate designs.

Use LED Step Light for outdoor or indoor pathway/step safety lighting applications.

## Features


- Easy install, 3-piece assembly fits into standard junction box, (not included)
- Die-cast aluminum face and trim plates
- Polycarbonate enclosure light engine with acrylic lens, fully sealed for outdoor use
- IP65 and UL listed for wet locations when used with outdoor junction box and gasket, (not included)

## LED Light Engine


- 12 LEDs
- 3W total consumption
- 120V-277V
- 110° beam angle
- 50,000+ hours

## Dimensions


- **LSL-WL** 4.75"W x 3"H x 0.375"D
- **LSL-HL** 4.75"W x 3"H x 0.375"D
- **LSL-VL** 3"W x 4.75"H x 0.375"D
- **LSL-HV** 4.75"W x 3"H x 1.375"D
- **LSL-VV** 3"W x 4.75"H x 1.125"D

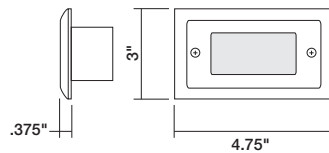


LSL-WL/HL/VL  
(Typical)

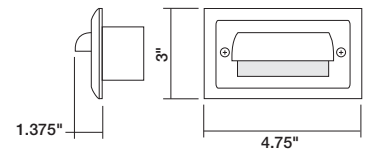

LSL-HV

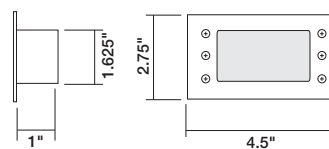

LED Light Engine

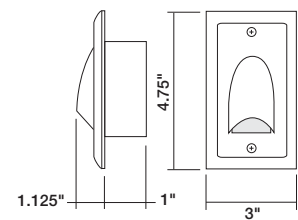

LSL-VV

## Catalog No.

Face Plate	Finish	LED*
<b>LSL-WL</b> White Acrylic Lens	<b>WH</b> White	<b>WW</b> Warm White, 3000K
<b>LSL-HL</b> Horizontal Louver	<b>BZ</b> Bronze	<b>AM</b> Amber, wildlife friendly
<b>LSL-VL</b> Vertical Louver	<b>BN</b> Brushed Nickel (Electroplate)	<b>BL</b> Blue
<b>LSL-HV</b> Horizontal Visor		
<b>LSL-VV</b> Vertical Visor		

Typical Cat. No: **LSL-HL-WH-WW**

\*Amber and Blue, special order

IP65

UL US LISTED