


## Accentlight, Open Aperture

## T4 MH

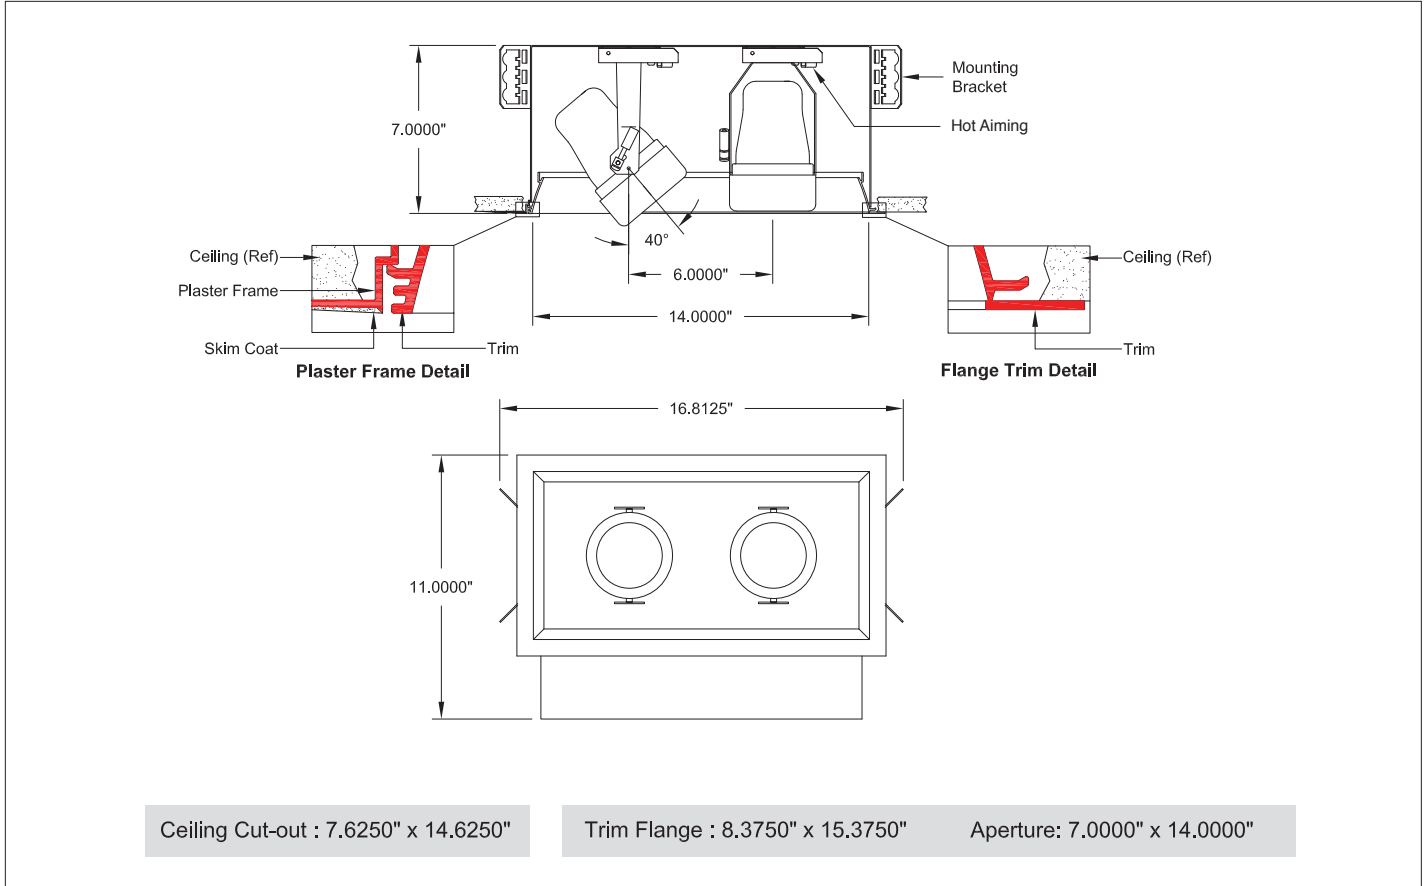

-2-T4M
- /B -
-AD-

Trim Type	Wattage	Trim Finish	Beam Spread (°)	Voltage
<input type="checkbox"/> VAP Plaster <input type="checkbox"/> VAF Flange	<input type="checkbox"/> 22 <input type="checkbox"/> 39 <input type="checkbox"/> 70	<input type="checkbox"/> W White <input type="checkbox"/> B Black	<input type="checkbox"/> 15 <input type="checkbox"/> 24 <input type="checkbox"/> 40	<input type="checkbox"/> 1 (120V) <input type="checkbox"/> 2 (277V)

### Description

Recessed open aperture metal halide accent fixture. Adjustable lampholders. Two T4 MH lamps. Flanged or plaster frame trim.

### Features

- Standard Lens: Clear
- Below ceiling access to the ballast and wiring.
- Lampholders are adjustable from 0°-40°.
- Plaster frame trim provides 0.062" reveal to minimize skim coat cracking.
- Hot Aiming permits lamp adjustment while lit.

### Fixture Specifications

Dimensions: 16.812"L x 11"W x 7"H  
 Weight: Approx. 10 lbs.  
 Ceiling Cutout: 7.625"L x 14.625"W

### Electrical

- Power Consumption: 156 watts max.
- Ambient temperature 100 °F. maximum.
- Integral electronic ballast, thermally protected
- Through branch wiring capable.

### Mounting

Universal mounting brackets included.  
 Contact factory for special ceiling conditions.

### Options (Consult factory)

- Lenses: Page 3

Photometry: Consult factory




All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

# VersaLux™ Series VA

## Accentlight, Open Aperture

T4 MH

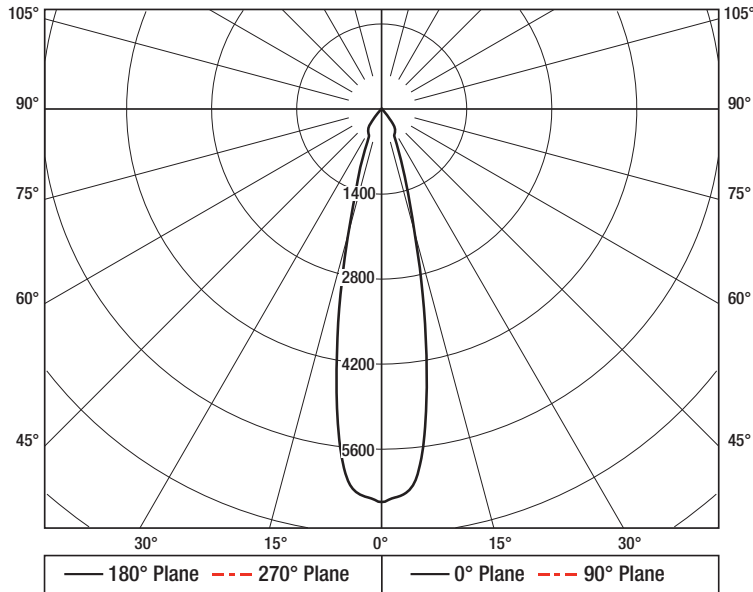


## 2 Lamp Photometrics

39 Watt T4 Metal Halide

Clear Lens

Photometry reports for other fixture configurations, consult factory

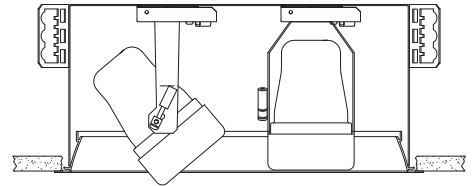

Total Luminaire Efficiency: 47.10%

### Candela Distribution

	0	15	30	45	60	75	90
0	1581	1581	1581	1581	1581	1581	1581
5	1523	1530	1529	1529	1528	1532	1528
10	1432	1430	1425	1432	1427	1427	1424
15	1117	1123	1120	1121	1123	1117	1121
20	525	523	525	526	525	527	528
25	129	130	129	129	129	129	128
30	73	72	72	72	71	72	72
35	76	76	76	76	76	75	77
40	70	70	70	70	70	71	71
45	51	51	51	51	51	51	51
50	40	40	40	40	39	40	40
55	20	21	20	20	21	21	20
60	6	6	6	6	6	6	6
65	2	2	2	2	2	2	2
70	1	1	1	1	1	1	1
75	0	0	0	0	0	0	0
80	0	0	0	0	0	0	0
85	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0


















### Zonal Lumen Summary

	5	73
10	136	
15	159	
20	98	
25	30	
30	20	
35	24	
40	25	
45	20	
50	17	
55	9	
60	3	
65	1	
70	0	
75	0	
80	0	
85	0	
90	0	

### Utilization

RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
0	56	56	56	56	55	55	55	55	52	52	52	50	50	50	48	48	48	47
1	54	53	52	51	53	52	51	50	50	49	49	48	48	47	47	46	46	45
2	52	50	49	47	51	49	48	47	48	47	46	47	46	45	45	45	44	43
3	50	48	46	44	49	47	45	44	46	44	43	45	44	43	44	43	42	41
4	48	45	43	42	48	45	43	42	44	42	41	43	42	41	42	41	40	40
5	47	44	41	40	46	43	41	40	42	41	39	42	40	39	41	40	39	38
6	45	42	40	38	44	41	39	38	41	39	38	40	39	37	40	38	37	37
7	43	40	38	36	43	40	38	36	39	37	36	39	37	36	38	37	36	35
8	42	39	36	35	42	38	36	35	38	36	35	38	36	35	37	36	34	34
9	41	37	35	34	40	37	35	34	37	35	34	36	35	33	36	34	33	33
10	40	36	34	33	39	36	34	33	36	34	32	35	34	32	35	33	32	32

**Lens Options**

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Snoot	SNT4
<input type="checkbox"/>		Cross Blade Baffle	XBT4
<input type="checkbox"/>		Hexagonal Louver	HXT4
<input type="checkbox"/>		Solite Spread Lens	SOT4
<input type="checkbox"/>		Frosted Solite Spread Lens	FST4
<input type="checkbox"/>		Prismatic Spread Lens	PRT4
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPT4
<input type="checkbox"/>		Skytex Linear Spread Lens	SKT4
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKT4
<input type="checkbox"/>		Flash Opal Lens	FOT4
<input type="checkbox"/>		Optivex UV Lens	UVT4
<input type="checkbox"/>		Frosted Clear Lens	FCT4
<input type="checkbox"/>		Red Filter Lens	RLT4
<input type="checkbox"/>		Green Filter Lens	GLT4
<input type="checkbox"/>		Blue Filter Lens	BLT4
<input type="checkbox"/>		Amber Filter Lens	ALT4
<input type="checkbox"/>		Dichroic Filter Lens	DLT4

For other accessory/lens options, consult factory.