
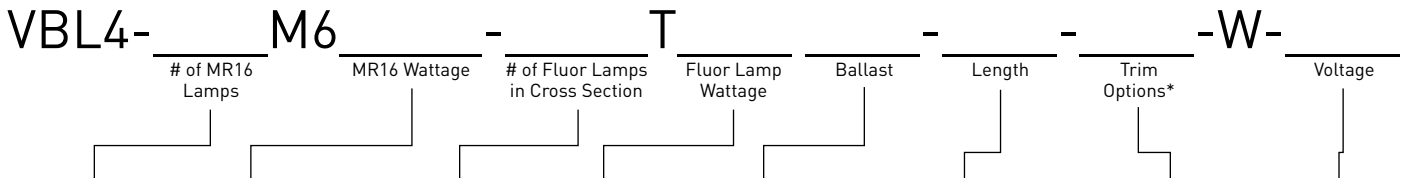


# Fluorescent Slot, Flush Lens with MR16 In-Lens Pinhole Aperture

T5

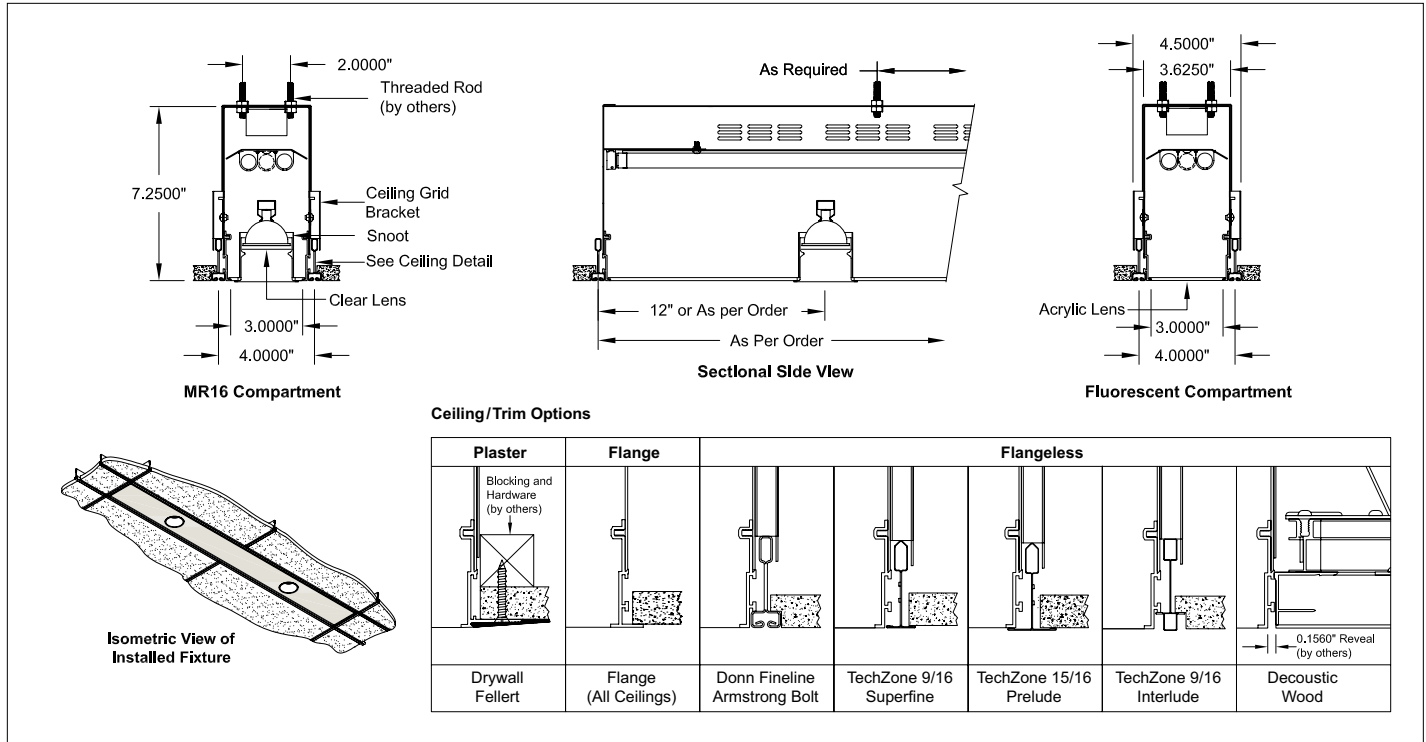

# of MR16	MR16 Wattage	# of Fluor in Cross Section	Fluor Wattage	Ballast (Specify below)	Length	Trim Options*	Voltage
<input type="checkbox"/> 1	<input type="checkbox"/> 20	<input type="checkbox"/> 1	See Configurations (Pages 2-3)	<input type="checkbox"/> E (Electronic) Std.	<input type="checkbox"/> 24" <input type="checkbox"/> 72"	<input type="checkbox"/> P (Plaster)	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> 2	<input type="checkbox"/> 37	<input type="checkbox"/> 2		<input type="checkbox"/> D (Dimming) †	<input type="checkbox"/> 36" <input type="checkbox"/> 84"	<input type="checkbox"/> F (Flange)	<input type="checkbox"/> 2 (277V)
<input type="checkbox"/> 3	<input type="checkbox"/> 50				<input type="checkbox"/> 48" <input type="checkbox"/> 96"	<input type="checkbox"/> X (Flangeless)	
					<input type="checkbox"/> 60" <input type="checkbox"/> Custom (specify)		

† Specify Ballast (required)

\* P=Plaster: For use with Drywall and Fellt.  
 F=Flange: Suitable for all ceiling types.  
 X=Flangeless: For use with Donn Fineline 9/16, Armstrong Bolt Slot 9/16, TechZone 9/16 Superfine, TechZone 15/16 Prelude, TechZone 9/16 Interlude, Decoustic and Wood.

**Description**  
 Fluorescent slot with flush lens and MR16 in-lens pinhole aperture. Fixed MR16 lamps.

- Features**
- Standard Lenses: MR16-clear, Fluorescent-Rabbeted frosted acrylic
  - Shiplapped lenses for sections longer than 96"
  - Fixtures fabricated to any length (Refer to Pages 2-3)
  - Continuous run length configurations with fully illuminated corners
  - Below ceiling access to ballast, transformer and wiring

**Fixture Specifications**  
 Finish: White (std), custom available  
 Weight: Approx. 7 lbs. per linear foot  
 Ceiling Cutout: Refer to Pages 2-3

**Electrical**

- Power Consumption: Per specification
- Ambient temperature 100 °F. maximum
- Integral electronic ballast(s), thermally protected and toroidal transformer(s)
- Through branch wiring capable

**Mounting**

- Threaded rod, hanger wire or alternate mounting by others, consult factory

- Options (Consult factory)**
- Accessories/Lenses: Specify on Page 4
  - Occupancy sensor, daylight control module and EM pack
  - HVAC, fire sprinkler, surveillance or public address systems integration
  - Downlight: Metal halide or LED modules

**Photometry:** Consult factory



All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

# Single Lamp Configurations

## VBL4

Job Name: \_\_\_\_\_ Fixture Type: \_\_\_\_\_


- 1 - Choose fixture configuration
- 2 - Select desired fluorescent lamp wattage

Single MR16 downlight is at center of fixture. Custom configurations upon request.

For fixture installation dimensions per trim type, follow formula below

Plaster	<b>Furthest extent of tape-in flange</b> Length: OAL + 1.6875", Width: 5.3125"
	<b>Ceiling cut out</b> Length: OAL + 0.125", Width: 3.75"
Flange	<b>Furthest extent of overlap flange</b> Length: OAL + 0.5625", Width: 4.1875"
	<b>Ceiling cut out</b> Length: OAL + 0.125", Width: 3.75"
Flangeless	<b>Opening for Wood/Tile/Decoustic ceilings</b> Length: OAL + 0.125", Width: 3.75"
	<b>CTC Grid spacing for T-Grid/ATC systems</b> Length: OAL + 0.375", Width: 4"

Example: Flangeless 48" (Nom) VBL4 in Decoustic ceiling  
Length: 47.625" + 0.125" = 47.75" x 3.75" Wide

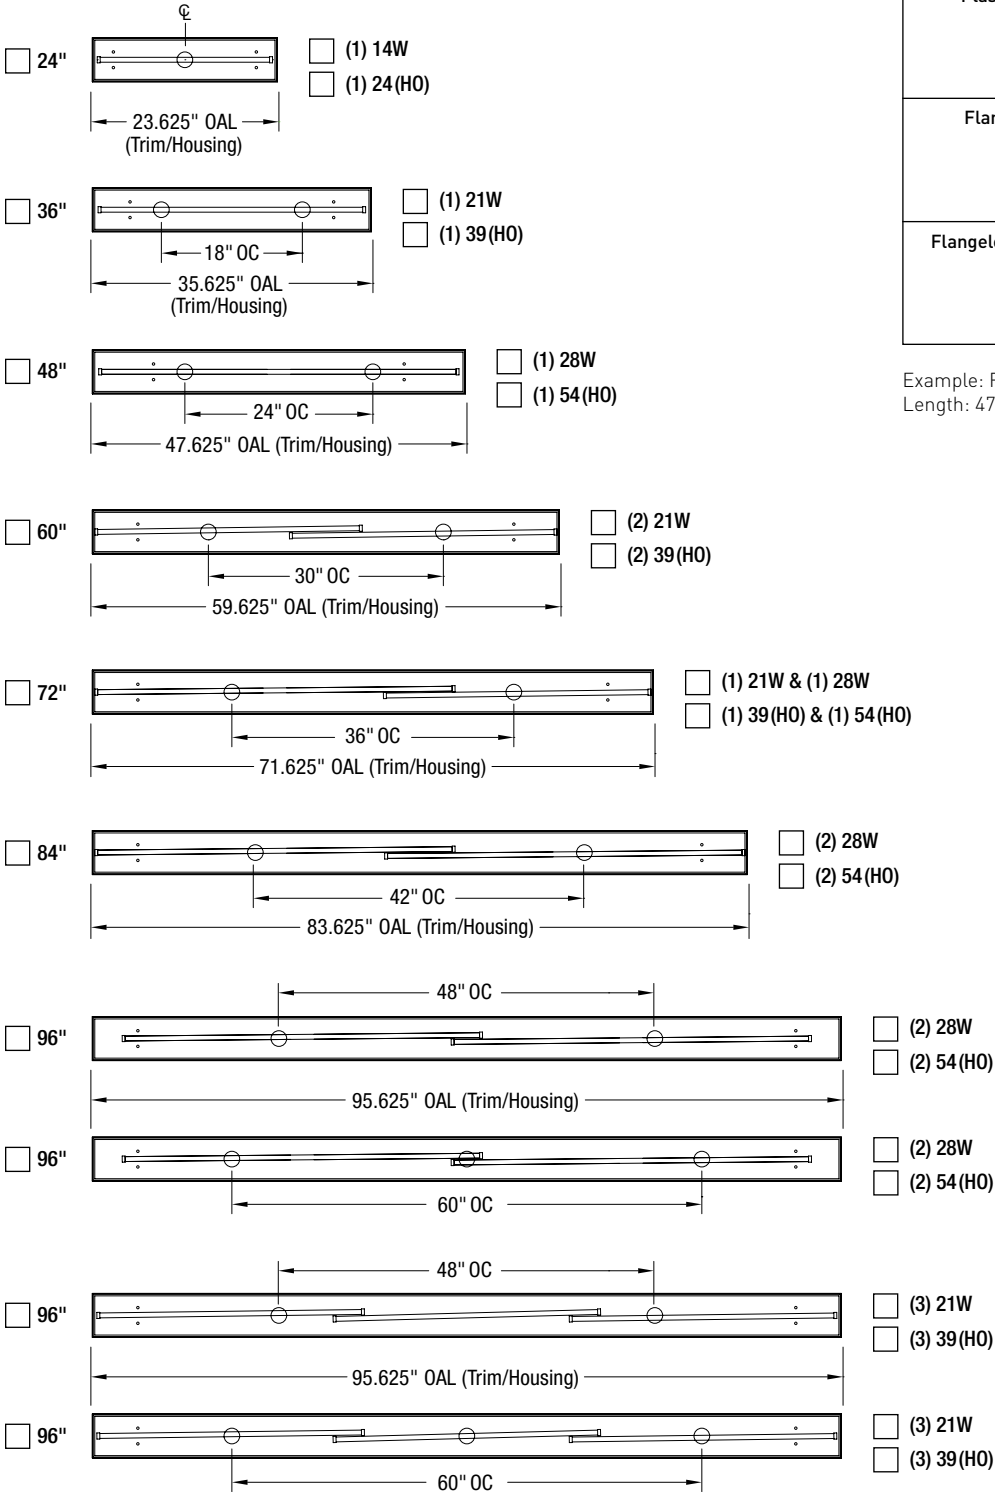

Starfire's patent pending EvenGlow™ system eliminates lamp/socket imaging and bright spots.

## VBL4

Job Name: \_\_\_\_\_ Fixture Type: \_\_\_\_\_


- 1 - Choose fixture configuration
- 2 - Select desired fluorescent lamp wattage

Single MR16 downlight is at center of fixture. Custom configurations upon request.

For fixture installation dimensions per trim type, follow formula below

Plaster	<b>Furthest extent of tape-in flange</b> Length: OAL + 1.6875", Width: 5.3125"
	<b>Ceiling cut out</b> Length: OAL + 0.125", Width: 3.75"
Flange	<b>Furthest extent of overlap flange</b> Length: OAL + 0.5625", Width: 4.1875"
	<b>Ceiling cut out</b> Length: OAL + 0.125", Width: 3.75"
Flangeless	<b>Opening for Wood/Tile/Decoustic ceilings</b> Length: OAL + 0.125", Width: 3.75"
	<b>CTC Grid spacing for T-Grid/ATC systems</b> Length: OAL + 0.375", Width: 4"

Example: Flangeless 48" (Nom) VBL4 in Decoustic ceiling  
Length: 47.625" + 0.125" = 47.75" x 3.75" Wide

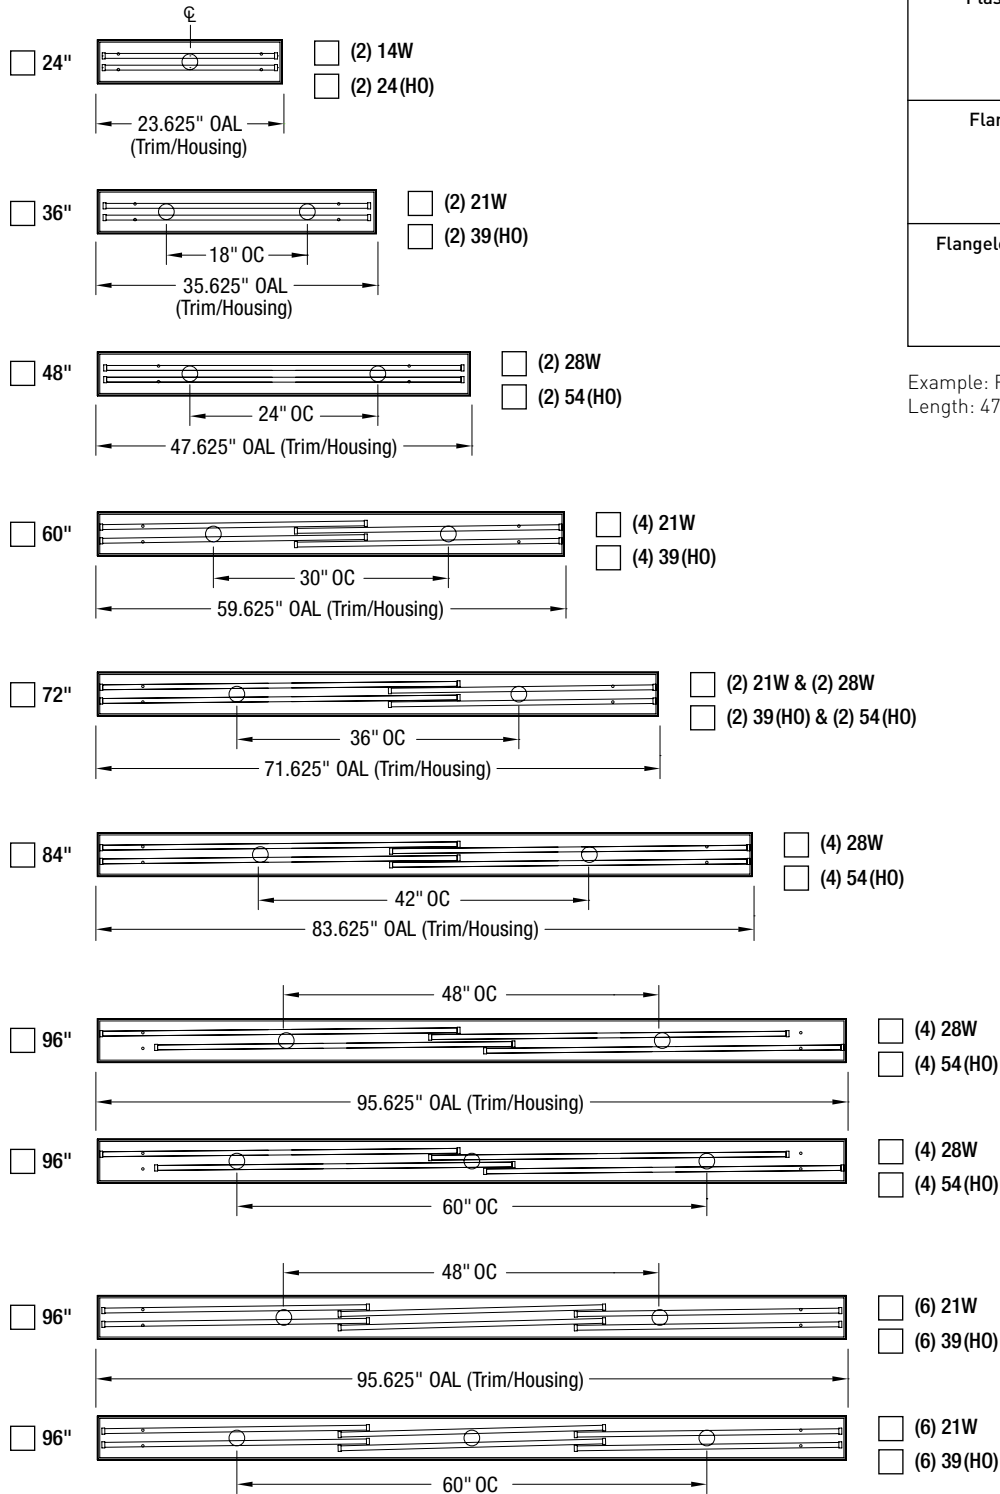

Starfire's patent pending EvenGlow™ system eliminates lamp/socket imaging and bright spots.

VBL4

Job Name:















Fixture Type:

**Fluorescent Options**

	Acrylic Lenses	Lens Efficiency	Cat. No.
<input type="checkbox"/>	Frosted (2067-P95)	81%	(standard)
<input type="checkbox"/>	2447-P95	47%	47P
<input type="checkbox"/>	D-Glare, Hi-Def	93%	DH

For other lens options, consult factory.

**Point Source Options**

	Accessories/Lenses	MR16 Cat. No.
<input type="checkbox"/>	 Solite Spread Lens	SOM6
<input type="checkbox"/>	 Frosted Solite Spread Lens	FSM6
<input type="checkbox"/>	 Prismatic Spread Lens	PRM6
<input type="checkbox"/>	 Frosted Prismatic Spread Lens	FPM6
<input type="checkbox"/>	 Skytex Linear Spread Lens	SKM6
<input type="checkbox"/>	 Frosted Skytex Linear Spread Lens	FKM6
<input type="checkbox"/>	 Flash Opal Lens	FOM6
<input type="checkbox"/>	 Optivex UV Lens	UVM6
<input type="checkbox"/>	 Frosted Clear Lens	FCM6
<input type="checkbox"/>	 Red Filter Lens	RLM6
<input type="checkbox"/>	 Green Filter Lens	GLM6
<input type="checkbox"/>	 Blue Filter Lens	BLM6
<input type="checkbox"/>	 Amber Filter Lens	ALM6
<input type="checkbox"/>	 Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.