


Fluorescent Video Conference Bi-Directional

T5

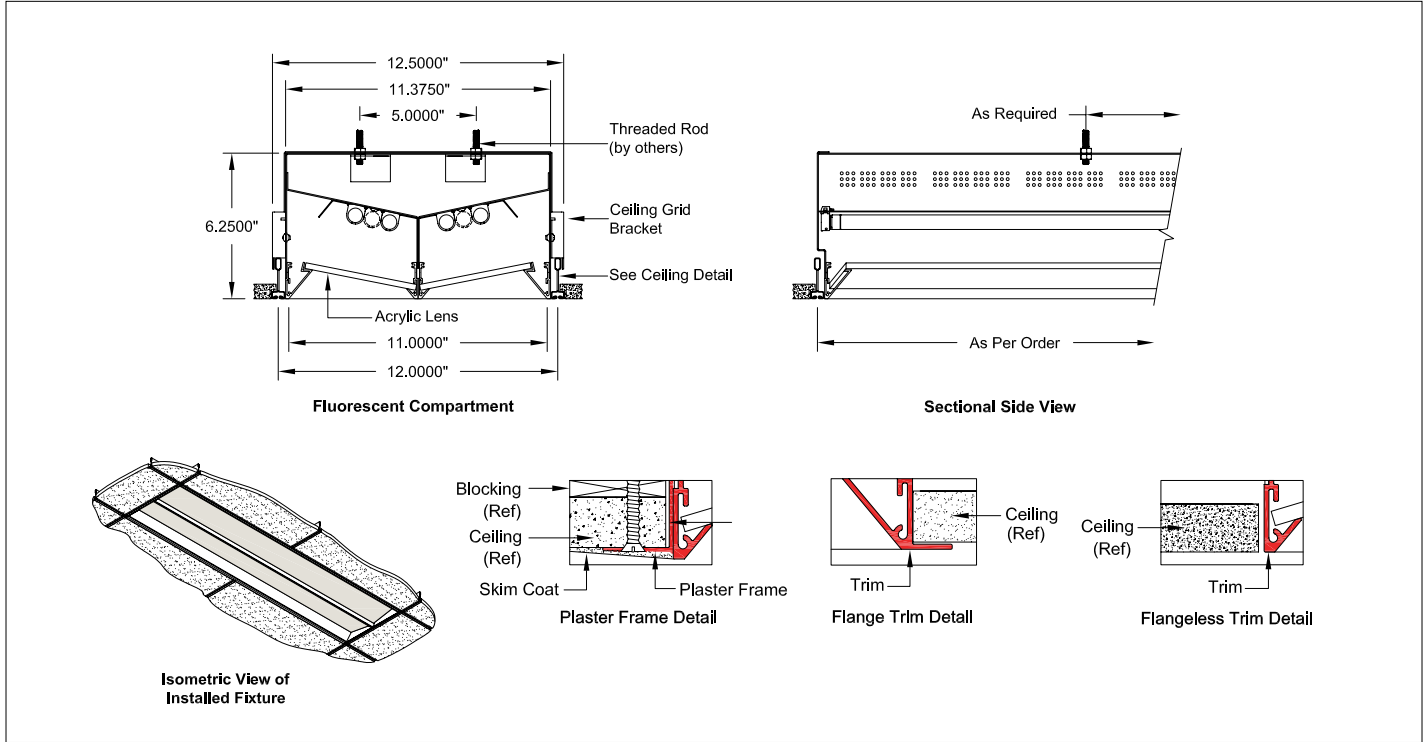

VC2- T - - -W-

of Fluor Lamps in Cross Section Fluor Lamp Wattage Ballast Length Trim Options* Voltage

| # of Fluor in Cross Section | Fluor Wattage | Ballast (Specify below) | Length (Nominal) | Trim Options* | Voltage |
|-----------------------------|--------------------------------|--|--|--|-----------------------------------|
| <input type="checkbox"/> 2 | See Configurations (Pages 2-3) | <input type="checkbox"/> E (Electronic) Std. | <input type="checkbox"/> 24" <input type="checkbox"/> 72" | <input type="checkbox"/> P (Plaster) | <input type="checkbox"/> 1 (120V) |
| <input type="checkbox"/> 4 | | <input type="checkbox"/> D (Dimming) † | <input type="checkbox"/> 36" <input type="checkbox"/> 84" <input type="checkbox"/> 48" <input type="checkbox"/> 96" <input type="checkbox"/> 60" <input type="checkbox"/> Custom (specify) | <input type="checkbox"/> F (Flange) <input type="checkbox"/> X (Flangeless) | <input type="checkbox"/> 2 (277V) |

† Specify Ballast (required)

* P=Plaster: For use with Drywall and Fellert.
 F=Flange: For use with all ceiling conditions.
 X=Flangeless: For use with Donn Fineline 9/16, Armstrong Bolt Slot 9/16, TechZone 9/16 Superfine, TechZone 15/16 Prelude, TechZone 9/16 Interlude, Decoustic and Wood.

Description
 Fluorescent video conference fixture. Symmetric aspect.

Features

- Standard Lens: Frosted acrylic
- Shiplapped lenses for sections longer than 96"
- Fixtures fabricated to any length (Refer to Pages 2-3)
- Continuous run length configurations with fully illuminated corners
- Below ceiling access to ballast and wiring

Fixture Specifications
 Finish: White (std), custom available
 Weight: Approx. 12 lbs. per linear foot
 Ceiling Cutout: Refer to Pages 2-3

Electrical

- Power Consumption: Per specification
- Ambient temperature 100 °F. maximum
- Integral electronic ballast(s), thermally protected
- Through branch wiring capable

Mounting

- Threaded rod, hanger wire or alternate mounting by others, consult factory

Options (Consult factory)

- Lenses: Specify on Page 4
- Occupancy sensor, daylight control module and EM pack
- Nippo, Feelux, or Lumilux Seamless lamping

Photometry: Consult factory



All designs and scale drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without the expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

Single Lamp Configurations

T5

VC2






Job Name: _____ Fixture Type: _____

- 1 - Choose fixture configuration
 - 2 - Select desired fluorescent lamp wattage
- Custom configurations upon request

For fixture installation dimensions per trim type, follow formula below

| | |
|------------|---|
| Plaster | Furthest extent of tape-in flange Length: OAL + 1.75", Width: 13.125" |
| | Ceiling cut out Length: OAL + 0.125", Width: 11.5" |
| Flange | Furthest extent of overlap flange Length: OAL + 1", Width: 12.375" |
| | Ceiling cut out Length: OAL + 0.125", Width: 11.5" |
| Flangeless | Opening for Wood/Tile/Decoustic ceilings Length: OAL + 0.125", Width: 11.5" |
| | CTC Grid spacing for T-Grid/ATC systems Length: OAL + 0.625", Width: 12" |

Example: Flangeless 48" (Nom) VC2 in Decoustic ceiling
Length: 47.375" + 0.125" = 47.5" x 11.5" Wide

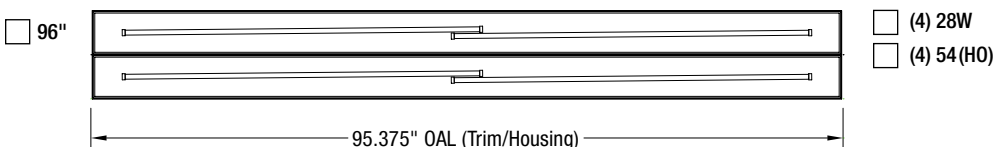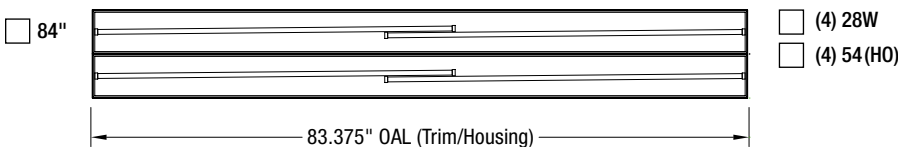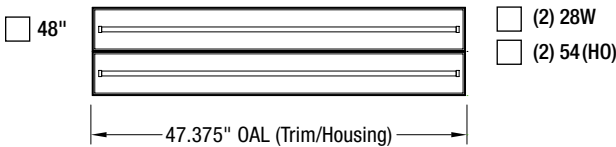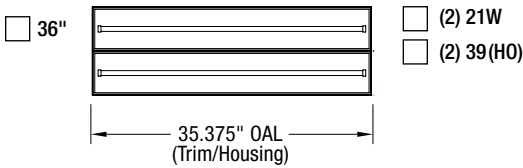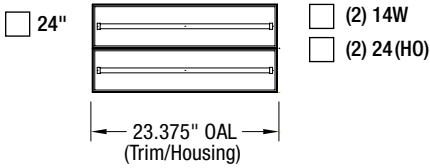

Starfire's patent pending EvenGlow™ system eliminates lamp/socket imaging and bright spots.

VC2





Job Name: _____ Fixture Type: _____

- 1 - Choose fixture configuration
 - 2 - Select desired fluorescent lamp wattage
- Custom configurations upon request

For fixture installation dimensions per trim type, follow formula below

| | |
|------------|---|
| Plaster | Furthest extent of tape-in flange Length: OAL + 1.75", Width: 13.125" |
| | Ceiling cut out Length: OAL + 0.125", Width: 11.5" |
| Flange | Furthest extent of overlap flange Length: OAL + 1", Width: 12.375" |
| | Ceiling cut out Length: OAL + 0.125", Width: 11.5" |
| Flangeless | Opening for Wood/Tile/Decoustic ceilings Length: OAL + 0.125", Width: 11.5" |
| | CTC Grid spacing for T-Grid/ATC systems Length: OAL + 0.625", Width: 12" |

Example: Flangeless 48" (Nom) VC2 in Decoustic ceiling
Length: 47.375" + 0.125" = 47.5" x 11.5" Wide

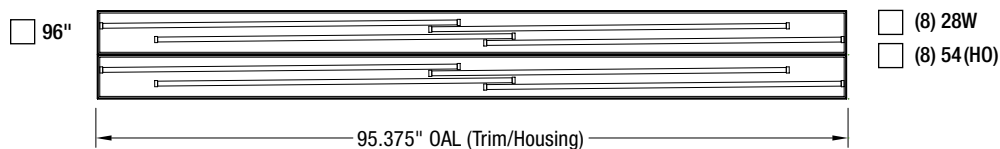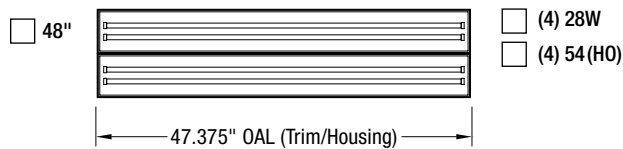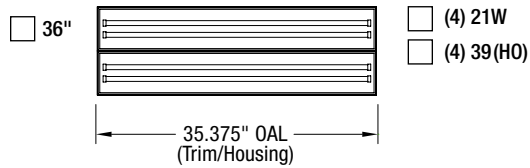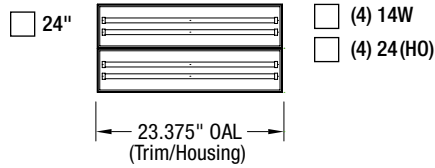

Starfire's patent pending EvenGlow™ system eliminates lamp/socket imaging and bright spots.

VC2

| | |
|-----------|---------------|
| Job Name: | Fixture Type: |
|-----------|---------------|

Fluorescent Options

| | Acrylic Lenses | Lens Efficiency | Cat. No. |
|--------------------------|-----------------------|-----------------|------------|
| <input type="checkbox"/> | Frosted (2067-P95) | 81% | (standard) |
| <input type="checkbox"/> | 2447-P95 | 47% | 47P |
| <input type="checkbox"/> | D-Glare, Hi-Def | 93% | DH |

For other lens options, consult factory.