

# VersaLux LED Direct/Indirect Pendant Connectors


LED



Connects VersaLux LED Direct/Indirect Pendants to Form Uniform Light Patterns

Job Name

Fixture Type

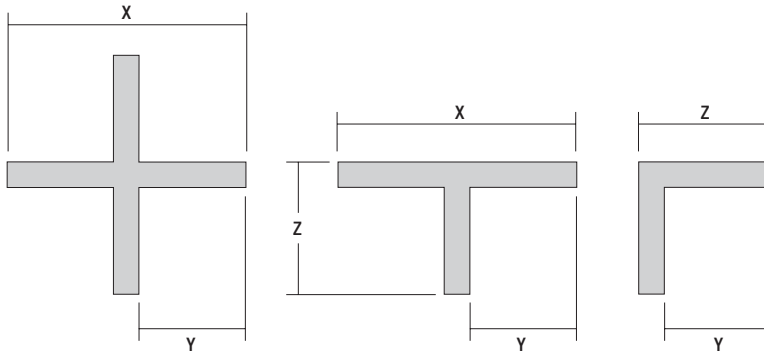

X, T, and L Connectors

### Connector Dimensions

	2"	4"	6"
<b>X</b>	45"	45"	45"
<b>Y</b>	21.31"	20.81"	19.81"
<b>Z</b>	23.69"	24.19"	25.19"

PH	DIRECT				INDIRECT				-W (Finish)
	Width	Connector	CRI	Color Temp	Output	CRI	Color Temp	Output	
2 2"	X T L	8 80+ 9 90+*	27 2700K	S Std. H High M Max. Custom: Specify Lm/Ft*	8 80+ 9 90+*	27 2700K	S Std. H High M Max. Custom: Specify Lm/Ft*	S Std. 0-10V (1%) E Lutron 5 Series (5%) H Lutron Hi-Lume (1%) D DALI (1%) W Wireless**	
4 4"			30 3000K 35 3500K 40 4000K TW 2700K-6500K			30 3000K 35 3500K 40 4000K TW 2700K-6500K			

Product Code Example: PH4X-L830H-830SS-W

X, T, and L-shaped connectors seamlessly join all VersaLux LED Direct/Indirect Pendants providing the flexibility to achieve small or large scaled illuminated patterns of uniform light.

### Features

- Self-contained fully lit sections plug together with other VersaLux sections for easy installation
- Connectors are welded providing exact angles and precision lens joints with no light leaks
- 2" or 4" fixture widths
- High performance acrylic flush snap-in lens in downlight compartment
- High efficiency, low cost, dynamic Tunable White option

### LED Specifications

- Starfire's proprietary EvenGlow™ system provides uniform illumination from end-to-end without lamp imaging, bright spots or shadows at any length
- Future proof LED boards sourced from world's leading suppliers
- Quick-Connect lighting modules plug together
- Independent power and dimming of direct and indirect circuits

### Fixture Specifications

- Housing/Trim: Heavy-duty extruded aluminum
- Finish: White (std), custom available
- Weight: Up to 3.7 lbs. per linear foot
- UL Listed, damp location

### Electrical

- Power consumption: Per specification based on LED configuration
- Input Voltage: 120-277V universal driver
- Ambient temperature: 100 °F maximum
- Integral electronic drivers
- Integral wiring buss between fixture sections
- Drivers with full dimming range at any output choice
- 1% Dimming: 0-10V standard (included), consult factory for other options

### Mounting

- Square canopies (std), round available. Contact factory for special ceiling conditions

### Options (Consult factory)

- Occupancy sensor, daylight control module

### LED Specifications/Photometry:

Refer to appropriate LED Direct/Indirect Pendant cut sheet

\* Factory to confirm availability  
 \*\* Specify wireless system  
 † For high performance dimming below 125 lm/ft, contact factory



STARFIRE LIGHTING, INC.  
 7 Donna Drive, Wood-Ridge, NJ 07075  
 starfirelighting.com

P 201.438.9540  
 F 201.438.9541

All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC., reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.