

2" VersaLux LED Surface Mount

LED




LED Linear Direct Surface with In-Lens Pinhole Aperture LED Downlight Modules

SDB2

Job Name

Fixture Type

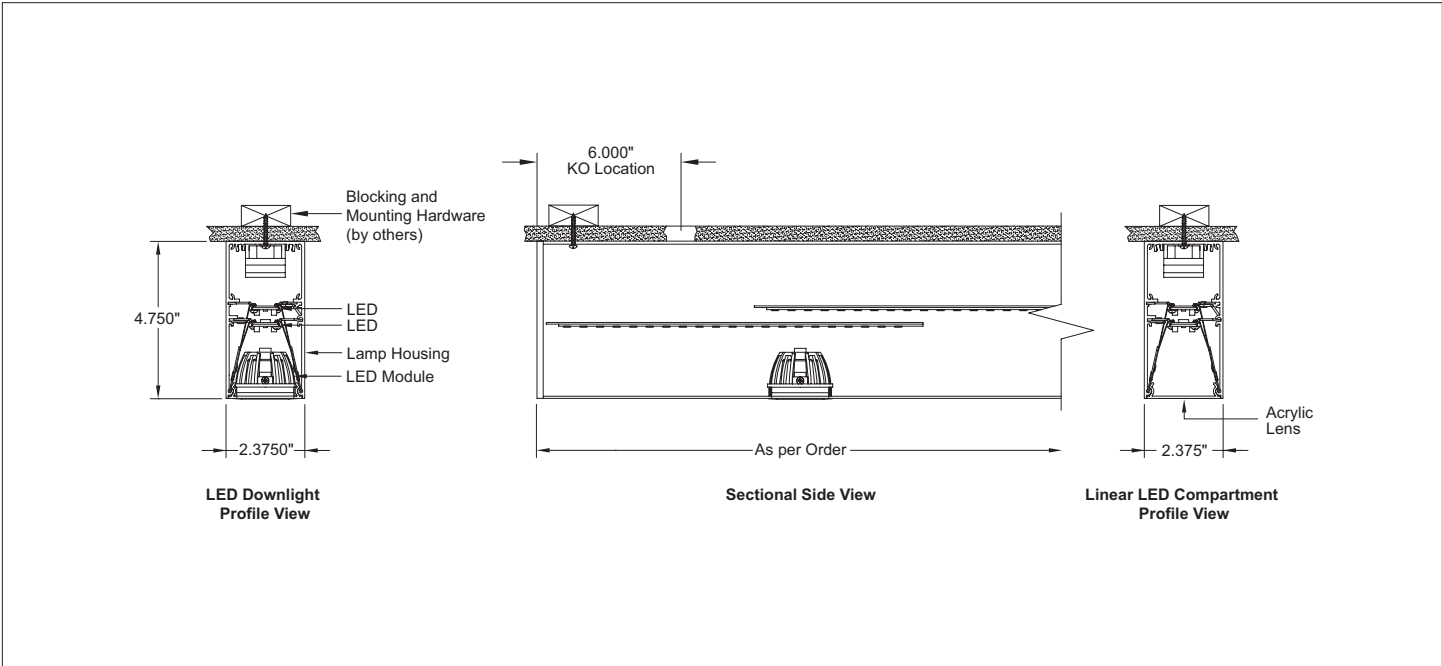

LED DOWNLIGHT						LINEAR LED						
SDB2-	D					-L						-W
Qty	CRI	Color	Output	Dimming	Lens	CRI	Color	Output	Dimming	Lens	Length()
1	880+	27 2700K	S Standard	S Std. 0-10V 1%	S 25° Spot	880+	27 2700K	S Standard	S Std. 0-10V 1%	DF Diffuser	Nominal:	
2	990+	30 3000K	H High	H ECO 1% ⁽²⁾	F 40° Flood	990+	30 3000K	H High	H ECO 1% ⁽²⁾	BW Batwing	24 36 48	
3		35 3500K	Custom: Specify Lumens ⁽¹⁾		D Diffuser		35 3500K	M Maximum	D DALI 1%		60 72 84	
4		40 4000K		P POE ⁽¹⁾	O Solite		40 4000K	Custom: Specify Lm/Ft ⁽¹⁾			96 (see Page 2)	
				W Wireless ⁽¹⁾	H Hexcel		TW 2700K-6500K		W Wireless ⁽¹⁾		Custom: Cxxx (in inches)	

Product Code Example: SDB2-3D830SS0-L830HSBW-C120-W

Linear flush lens, direct surface fixture with in-lens pinhole LED downlight module(s). Linear portion utilizes high performance LED boards, snap-in lenses and full reflectors. Downlight module(s) utilize a high performance COB component and reflector behind a clear or frosted lens.

Features

- Starfire's proprietary EvenGlow™ system provides uniform illumination from end-to-end without lamp imaging, bright spots or shadows at any length
- Fixtures fabricated to any length without custom engineering
- Exceptional lumen per watt efficiency
- High efficiency, low cost, Tunable White option
- High performance snap-in lenses; flush diffuser or batwing
- Combine with welded corner Connectors to form small or large scaled patterns of uniform light

Fixture Specifications

- Housing/Trim: Heavy-duty extruded aluminum
- Finish: White (std), custom available
- Weight: Approx. 3.4 lbs. per linear foot, plus 0.25 lbs. per VDM downlight module
- UL Listed, (indoor non-condensing)
- Linear LED: Page 2, VDM: Download spec sheet

Electrical

- Power consumption: Per specification based on LED configuration
- Input Voltage: 120-277V universal driver
- Ambient operating range: -4 °F to +100 °F
- Integral electronic drivers
- Independent linear and downlight circuiting
- Integral wiring bus between fixture sections
- Drivers with full dimming range at any output choice
- Dimming: 0-10V 1% standard, contact factory for options

Mounting

- Screw mount housing to blocking
- Contact factory for special ceiling conditions

Options (Consult factory)

- Occupancy sensor, daylight control module
- EM pack (Delivers 800+ total lumens for 90 mins). Specify length and location (+/- 2ft) at time of order

⁽¹⁾ Specify – Factory to confirm

⁽²⁾ Minimum of two VDM modules per fixture



STARFIRE LIGHTING, INC.
7 Donna Drive, Wood-Ridge, NJ 07075
starfirelighting.com

P 201.438.9540
F 201.438.9541

All designs and drawings are the property of STARFIRE LIGHTING, INC. We reserve the right to make changes to specifications and approved designs at any time without notice to facilitate manufacturing methods to the extent that such changes do not compromise design integrity. All performance specifications are subject to +/- 10% deviation.

LED Linear Direct Surface with In-Lens Pinhole Aperture LED Downlight Modules

SDB2

LED Strip

High output edge-to-edge, end-to-end illumination

- Choice of lumen output levels:
 - S:** Standard
 - H:** High
 - M:** Maximum
 - C:** Custom (between 400 and 1000 Lm/Ft)
- LED Efficiency: Up to 160 Lm/Wt at Max. output and 180 Lm/Wt at Standard power (at 80+ CRI)
- L70: 50,000+ hours at Maximum output
- Color Consistency: Equal or better than 3 SCDM with chip mixing
- 5 year limited warranty*

Fixture Overall Length

Nominal	Actual
24"	23.5"
36"	34.5"
48"	45.5"
60"	56.5"
72"	72"
84"	84"
96"	95"


Fixture Length Ordering Example:

For a nominal 36" length (34.5" exact): enter **36**


To order an exact 36" length: enter **C36**

Contact factory for fixture installation dimensions


Diffuser

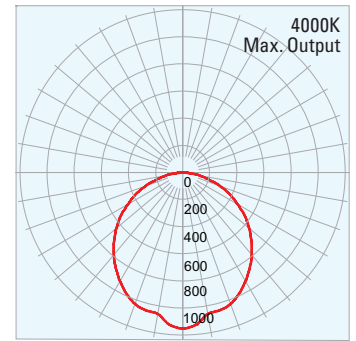


1/2" Drop

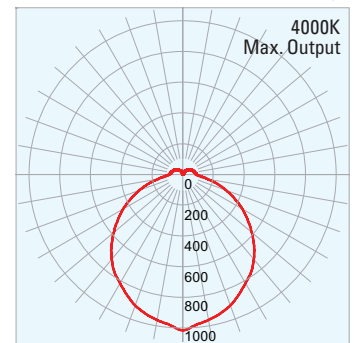

2" Drop

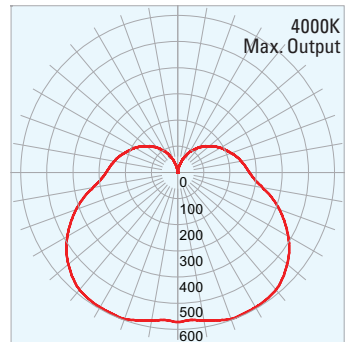

Batwing

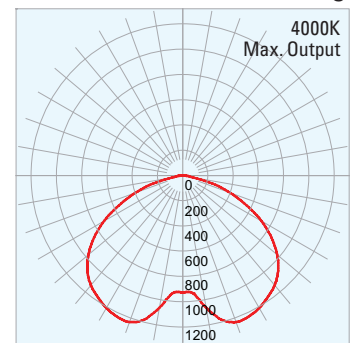

Diffuser

80 CRI		4000K		3500K		3000K		2700K	
Output Setting	Lm/Ft	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt
S Standard	400	3.4	119.0	3.4	116.7	3.6	112.0	4.0	99.4
H High	700	6.2	112.6	6.3	110.2	6.6	105.6	7.7	91.4
M Maximum	850	7.8	109.4	7.9	107.0	8.3	102.3	9.7	87.4

1/2" Drop Lens

80 CRI		4000K		3500K		3000K		2700K	
Output Setting	Lm/Ft	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt
S Standard	400	3.3	122.0	3.3	119.6	3.5	114.8	3.9	102.0
H High	700	6.1	115.6	6.2	113.2	6.5	108.4	7.4	94.0
M Maximum	850	7.6	112.4	7.7	110.0	8.1	105.2	9.4	90.0

2" Drop Lens

80 CRI		4000K		3500K		3000K		2700K	
Output Setting	Lm/Ft	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt
S Standard	400	2.7	147.3	2.8	144.4	2.9	138.7	3.2	123.8
H High	700	5.0	140.8	5.1	138.0	5.3	132.3	6.0	115.8
M Maximum	850	6.2	137.6	6.3	134.8	6.6	129.0	7.6	111.8

Batwing

80 CRI		4000K		3500K		3000K		2700K	
Output Setting	Lm/Ft	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt
S Standard	400	3.1	131.1	3.1	128.5	3.2	123.4	3.6	109.8
H High	700	5.6	124.7	5.7	122.1	6.0	117.0	6.9	101.8
M Maximum	850	7.0	121.5	7.1	118.9	7.5	113.8	8.7	97.8

Performance data for nominal 4 foot lengths or greater

* See Starfire website for Product Limited Warranty



STARFIRE LIGHTING, INC.
7 Donna Drive, Wood-Ridge, NJ 07075
starfirelighting.com

P 201.438.9540
F 201.438.9541

All designs and drawings are the property of STARFIRE LIGHTING, INC. We reserve the right to make changes to specifications and approved designs at any time without notice to facilitate manufacturing methods to the extent that such changes do not compromise design integrity. All performance specifications are subject to +/- 10% deviation.