


VersaLux Perimeter LED Slot, Regressed Snap-in Lens

VRP2

White LEDs

High output edge-to-edge, end-to-end illumination

- Choice of lumen output levels:
 - S:** Standard
 - H:** High
 - M:** Maximum
 - C:** Custom (between 200 and 1100 Lm/Ft) depending upon configuration, consult factory
- LED Efficiency: Up to 160 Lm/Wt at Maximum output and 180 Lm/Wt at Standard power (at 80+ CRI)
- L70: 50,000+ hours at Maximum output
- Proprietary in-house, ultra-tight Vf binned LEDs for uniform intensity
- Color Consistency: Equal or better than 3 SCDM with chip mixing
- L70: 50,000+ hours at Maximum output
- 5 year limited warranty*

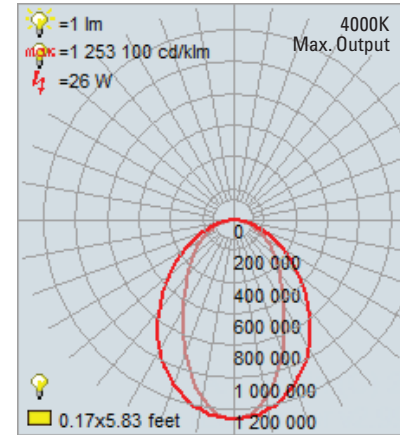

1" Regressed Lens

80 CRI		4000K		3500K		3000K		2700K (90 CRI only)	
Output Setting	Lm/Ft	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt
S Standard	400	3.8	105.0	3.8	104.0	4.0	101.0	4.3	93.3
H High	700	7.0	99.5	7.1	98.5	7.3	95.4	8.0	87.8
M Maximum	850	8.8	96.7	8.9	95.7	9.2	92.6	10.0	85.0

3" Regressed Lens

80 CRI		4000K		3500K		3000K		2700K (90 CRI only)	
Output Setting	Lm/Ft	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt
S Standard	400	4.2	94.9	4.3	94.0	4.4	91.2	4.8	84.2
H High	700	7.8	89.4	7.9	88.4	8.2	85.6	8.9	78.7
M Maximum	850	9.8	86.6	9.9	85.7	10.3	82.9	N/A	N/A

LV5

RGB & RGBW LEDs

1" Regressed Lens

	Lm/Ft	Wt/Ft	Lm/Wt
RGB (all on)	217	10.4	21.0
White	265	3.9	68.4
RGBW (all on)	482	14.2	33.9

3" Regressed Lens

	Lm/Ft	Wt/Ft	Lm/Wt
RGB (all on)	196	10.4	19.0
White	239	3.9	61.7
RGBW (all on)	435	14.2	30.6

Output adjustable with DMX-512 Control

* See Starfire website for Product Limited Warranty



STARFIRE LIGHTING, INC.
7 Donna Drive, Wood-Ridge, NJ 07075
starfirelighting.com

P 201.438.9540
F 201.438.9541


All designs and drawings are the property of STARFIRE LIGHTING, INC. We reserve the right to make changes to specifications and approved designs at any time without notice to facilitate manufacturing methods to the extent that such changes do not compromise design integrity. All performance specifications are subject to +/- 10% deviation.

VersaLux Perimeter LED Slot, Regressed Snap-in Lens

VRP2

Ceiling Dimensions


Grid Ceiling Dimensions

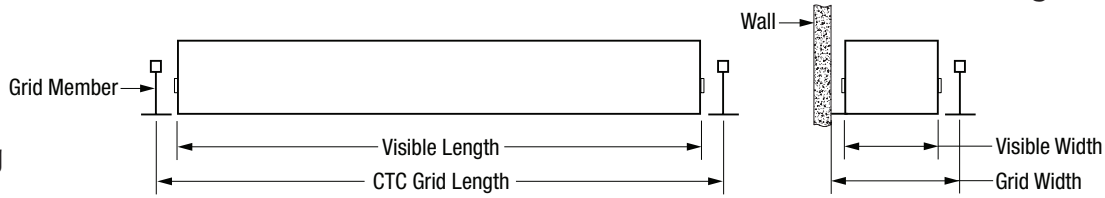

Order CTC Grid Length	9/16", Don Fineline, Decoustic			15/16"		
	Visible Length	Visible Width	Grid Width	Visible Length	Visible Width	Grid Width
24"	23 3/8"	2 3/8"	3 1/8"	23"	2 3/8"	3 5/16"
30"	29 3/8"	2 3/8"	3 1/8"	29"	2 3/8"	3 5/16"
36"	35 3/8"	2 3/8"	3 1/8"	35"	2 3/8"	3 5/16"
48"	47 3/8"	2 3/8"	3 1/8"	47"	2 3/8"	3 5/16"
60"	59 3/8"	2 3/8"	3 1/8"	59"	2 3/8"	3 5/16"
72"	71 3/8"	2 3/8"	3 1/8"	71"	2 3/8"	3 5/16"
84"	83 3/8"	2 3/8"	3 1/8"	83"	2 3/8"	3 5/16"
90"	89 3/8"	2 3/8"	3 1/8"	89"	2 3/8"	3 5/16"
96"	95 3/8"	2 3/8"	3 1/8"	95"	2 3/8"	3 5/16"

Custom Fixture Length Example:

A 24" Nominal Order Length yields a 23 3/8" Visible Length.
 For a 24" Visible Length, order a Custom Length of 24 5/8".
 See charts below for length adjustments per trim type.

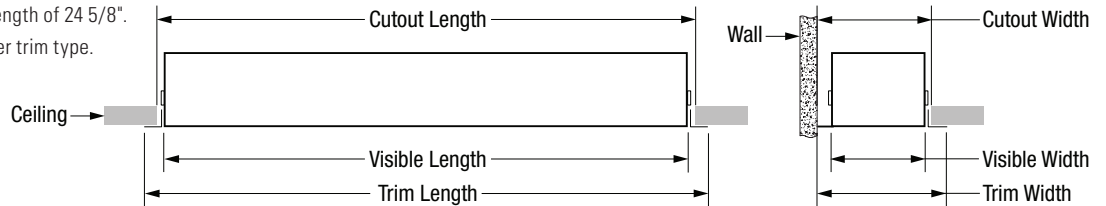

Solid Ceiling Dimensions

Fixture must be installed before ceiling

Nominal Order Length	Visible Length	Visible Width	Plaster Flange				1" Flange			
			Trim Length	Trim Width	Cutout Length	Cutout Width	Trim Length	Trim Width	Cutout Length	Cutout Width
24"	23 3/8"	2 3/8"	26 3/32"	4 3/16"	24 1/4"	3 1/4"	25 1/8"	3 11/16"	24 1/4"	3 1/4"
30"	29 3/8"	2 3/8"	32 3/32"	4 3/16"	30 1/4"	3 1/4"	31 1/8"	3 11/16"	30 1/4"	3 1/4"
36"	35 3/8"	2 3/8"	38 3/32"	4 3/16"	36 1/4"	3 1/4"	37 1/8"	3 11/16"	36 1/4"	3 1/4"
48"	47 3/8"	2 3/8"	50 3/32"	4 3/16"	48 1/4"	3 1/4"	49 1/8"	3 11/16"	48 1/4"	3 1/4"
60"	59 3/8"	2 3/8"	62 3/32"	4 3/16"	60 1/4"	3 1/4"	61 1/8"	3 11/16"	60 1/4"	3 1/4"
72"	71 3/8"	2 3/8"	74 3/32"	4 3/16"	72 1/4"	3 1/4"	73 1/8"	3 11/16"	72 1/4"	3 1/4"
84"	83 3/8"	2 3/8"	86 3/32"	4 3/16"	84 1/4"	3 1/4"	85 1/8"	3 11/16"	84 1/4"	3 1/4"
90"	89 3/8"	2 3/8"	92 3/32"	4 3/16"	90 1/4"	3 1/4"	91 1/8"	3 11/16"	90 1/4"	3 1/4"
96"	95 3/8"	2 3/8"	98 3/32"	4 3/16"	96 1/4"	3 1/4"	97 1/8"	3 11/16"	96 1/4"	3 1/4"
Custom Order Length	Order Length - 5/8"	2 3/8"	Order Length + 2 3/32"	4 3/16"	Order Length + 1/4"	3 1/4"	Order Length + 1 1/8"	3 11/16"	Order Length + 1/4"	3 1/4"

Nominal Order Length	Visible Length	Visible Width	1/2" Flange				Grid Trim (No Flange)			
			Trim Length	Trim Width	Cutout Length	Cutout Width	Trim Length	Trim Width	Cutout Length	Cutout Width
24"	23 3/8"	2 3/8"	24 3/16"	3 7/32"	24 1/4"	3 1/4"	23 3/8"	2 13/16"	23 1/2"	2 7/8"
30"	29 3/8"	2 3/8"	30 3/16"	3 7/32"	30 1/4"	3 1/4"	29 3/8"	2 13/16"	29 1/2"	2 7/8"
36"	35 3/8"	2 3/8"	36 3/16"	3 7/32"	36 1/4"	3 1/4"	35 3/8"	2 13/16"	35 1/2"	2 7/8"
48"	47 3/8"	2 3/8"	48 3/16"	3 7/32"	48 1/4"	3 1/4"	47 3/8"	2 13/16"	47 1/2"	2 7/8"
60"	59 3/8"	2 3/8"	60 3/16"	3 7/32"	60 1/4"	3 1/4"	59 3/8"	2 13/16"	59 1/2"	2 7/8"
72"	71 3/8"	2 3/8"	72 3/16"	3 7/32"	72 1/4"	3 1/4"	71 3/8"	2 13/16"	71 1/2"	2 7/8"
84"	83 3/8"	2 3/8"	84 3/16"	3 7/32"	84 1/4"	3 1/4"	83 3/8"	2 13/16"	83 1/2"	2 7/8"
90"	89 3/8"	2 3/8"	90 3/16"	3 7/32"	90 1/4"	3 1/4"	89 3/8"	2 13/16"	89 1/2"	2 7/8"
96"	95 3/8"	2 3/8"	96 3/16"	3 7/32"	96 1/4"	3 1/4"	95 3/8"	2 13/16"	95 1/2"	2 7/8"
Custom Order Length	Order Length - 5/8"	2 3/8"	Order Length + 3/16"	3 7/32"	Order Length + 1/4"	3 1/4"	Order Length - 5/8"	2 13/16"	Order Length - 1/2"	2 7/8"

For lengths over 96", consult factory regarding cutout dimensions



STARFIRE LIGHTING, INC.
 7 Donna Drive, Wood-Ridge, NJ 07075
 starfirelighting.com

P 201.438.9540
 F 201.438.9541

All designs and drawings are the property of STARFIRE LIGHTING, INC. We reserve the right to make changes to specifications and approved designs at any time without notice to facilitate manufacturing methods to the extent that such changes do not compromise design integrity. All performance specifications are subject to +/- 10% deviation.