


LED Step Light

Job Name:


Fixture Type:

LED LIGHTING SYSTEM

Series LSL

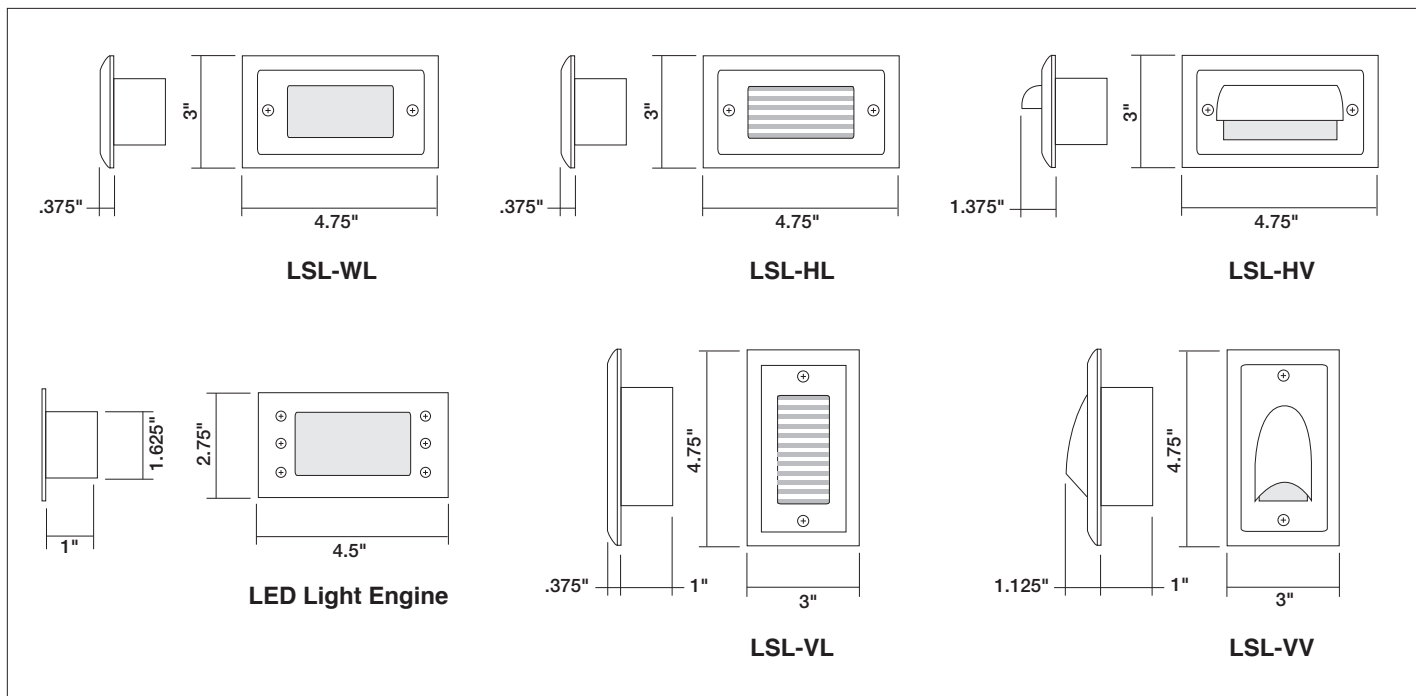

Ordering Guide

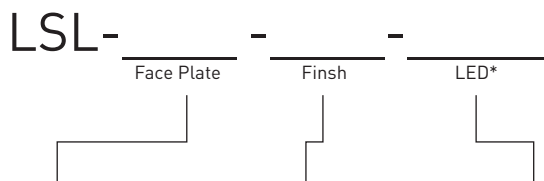

| Face Plate | Finish | LED* |
|--|---|--|
| <input type="checkbox"/> WL White Acrylic Lens | <input type="checkbox"/> WH White | <input type="checkbox"/> WW Warm White- 3000°K |
| <input type="checkbox"/> HL Horizontal Louver | <input type="checkbox"/> BZ Bronze | <input type="checkbox"/> AM Amber- wildlife friendly |
| <input type="checkbox"/> VL Vertical Louver | <input type="checkbox"/> BN Brushed Nickel (Electroplate) | <input type="checkbox"/> BL Blue |
| <input type="checkbox"/> HV Horizontal Visor | | |
| <input type="checkbox"/> VV Vertical Visor | | |

Description

LED Step Light is a 120-277 volt, recessed lighting system with 5 distinctive face plate designs.

Use LED Step Light for outdoor or indoor pathway/step safety lighting applications.

Features

- 12 LEDs
- Easy install, 3-piece assembly fits into standard junction box, (not supplied)
- Die-cast aluminum face and trim plates
- Polycarbonate enclosure light engine with acrylic lens, fully sealed for outdoor use
- IP65 and UL listed for wet locations

Dimensions

- LSL-WL 4.75"W x 3"H x 0.375"D
- LSL-HL 4.75"W x 3"H x 0.375"D
- LSL-VL 3"W x 4.75"H x 0.375"D
- LSL-HV 4.75"W x 3"H x 1.375"D
- LSL-VV 3"W x 4.75"H x 1.125"D

LED Light Engine

- Wattage: 3W total consumption
- Beam Angle: 110°
- Lamp Life: 50,000+ hour

Mounting

- Installs into standard junction box, (not included).
- Full IP65 rating only when used with outdoor junction box and gasket, (not included).

*Amber and Blue, special order



All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.