

1" VersaLux LED Surface Mount

LED




Linear Narrow Profile
LED Direct Surface with Flush Lens
and Internal Driver

SDN1 LED

Job Name

Fixture Type

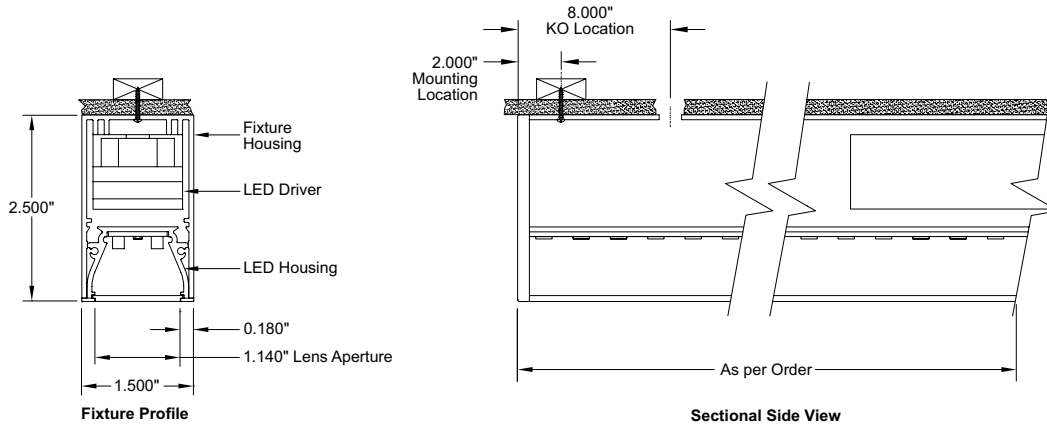

CRI	Color Temp	Output	Dimming ⁽²⁾	Length (inches)
8 80+	27 2700K	S Std.	S Std. 0-10V (1%)	Nominal: 24 ⁽⁴⁾ 36 48
9 90+ ⁽¹⁾	30 3000K	H High	E Lutron 5 Series (5%)	60 72 84
	35 3500K	M Max.	H Lutron Hi-Lume (1%)	96 (see Page 2)
	40 4000K	Custom: Specify Lm/Ft ⁽¹⁾	D DALI (1%)	Custom: Cxxx (in inches)
	TW 2700K-6500K		W Wireless ⁽³⁾	

Product Code Example: **SDN1-L830H-S-C120-W**

An ultra-clean line, low profile, narrow aperture direct linear surface mount fixture utilizing high performance LED boards and lenses. Extruded aluminum housing with internal driver.

Features

- Starfire's proprietary EvenGlow™ system provides uniform lens illumination from edge-to-edge without lamp imaging, bright spots or shadows at any length
- Fixtures fabricated to any specified length without custom engineering
- Exceptional lumen per watt efficiency
- High efficiency, low cost, dynamic Tunable White option
- High performance acrylic flush diffusion lens
- Future proof LED boards sourced from world's leading suppliers

Fixture Specifications

- Housing: Heavy-duty extruded aluminum
- Finish: White (std), custom available
- Weight: Approx. 1.3 lbs per linear foot
- UL Listed, (indoor non-condensing)

Electrical

- Power consumption: Per specification based on LED configuration
- Input Voltage: 120-277V universal driver
- Ambient operating range: -4 °F to +100 °F
- Drivers with full dimming range at any output choice
- 1% Dimming: 0-10V standard (included), consult factory for other options

Mounting

- Screw mount housing to blocking. Consult factory for special ceiling conditions

Options (Consult factory)

- Occupancy sensor, daylight control module
- EM pack in 4ft segments. Delivers 675 lumens for 90 mins. Specify location(+/- 2ft) at time of order

LED Specifications/Photometry: Page 2

(1) Factory to confirm availability
(2) 1% PWM dimming. If CCR is required, contact factory
(3) Specify wireless system
(4) Available in output levels of 450 lm/ft or greater only



STARFIRE LIGHTING, INC.
7 Donna Drive, Wood-Ridge, NJ 07075
starfirelighting.com

P 201.438.9540
F 201.438.9541

All designs and drawings are the property of STARFIRE LIGHTING, INC. We reserve the right to make changes to specifications and approved designs at any time without notice to facilitate manufacturing methods to the extent that such changes do not compromise design integrity. All performance specifications are subject to +/- 10% deviation.

