

VersaLux LED Perimeter Connector - Regressed Lens


LED



Connects VersaLux Regressed Lens LED Perimeter Slots to Form Uniform Light Patterns

Job Name

Fixture Type

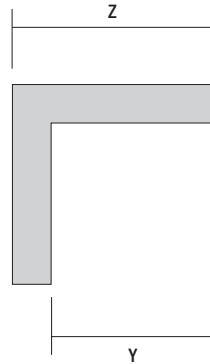


Connector Dimensions

	2"	4"	6"
Y	21.31"	20.81"	19.81"
Z	23.69"	24.19"	25.19"

L Connector

Wall Trim Detail

Ceiling Trim Detail

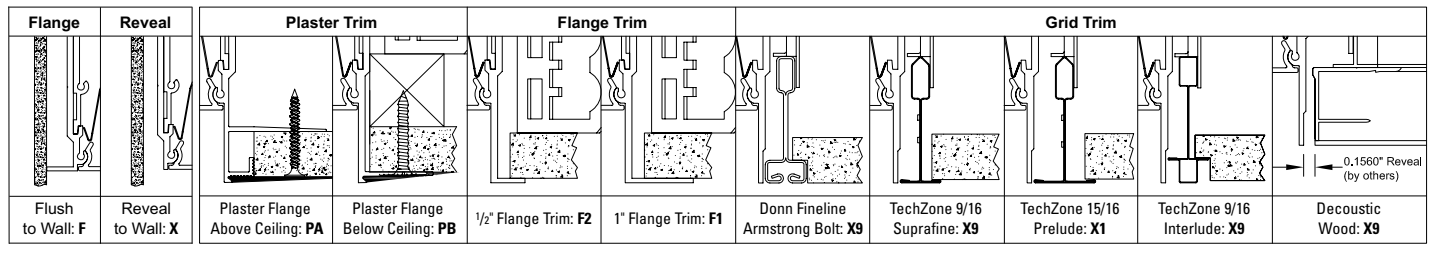

Width	Corner	CRI	Color	Output	Dimming†	Wall Trim	Ceiling Trim
2 2"	N Inside	8 80+	27 2700K	S Std.	S Std 0-10V (1%)	F Flange	PA Plaster Flange Above
4 4"	O Outside	9 90+*	30 3000K	H High	E Lutron 5 Series (5%)	X Reveal	PB Plaster Flange Below
6 6"			35 3500K	M Max.	H Lutron Hi-Lume (1%)		F1 Flange 1"
			40 4000K	Custom: Specify Lm/Ft*	D DALI (1%)		F2 Flange 1/2"
			TW 2700K-6500K		W Wireless**		X9 9/16 Grid Trim
							X1 15/16 Grid Trim



Product Code Example: **VRP4N-L830HS-F-X9-W**

L-shaped Connector seamlessly joins VersaLux Regressed Lens LED Perimeter Slots providing the flexibility to achieve small or large scaled illuminated patterns of uniform light.

Features

- Self-contained fully lit sections plug together with other VersaLux sections for easy installation
- Connectors are welded providing exact angles and precision lens joints with no light leaks
- 2", 4", or 6" fixture widths
- Snap-in high performance acrylic lenses
- High efficiency, low cost, dynamic Tunable White option
- Plaster, flanged or flangeless trim
- Suitable for all ceiling types
- Consult factory for custom angles

LED Specifications

- Starfire's proprietary EvenGlow™ system provides uniform illumination from end-to-end without lamp imaging, bright spots or shadows at any length
- Exceptional lumen per watt efficiency

- Future proof LED boards sourced from world's leading suppliers
- Quick-Connect lighting modules plug together

Fixture Specifications

- Housing/Trim: Heavy-duty extruded aluminum
- Finish: White (std), custom available
- Weight: Up to 3.7 lbs. per linear foot
- UL Listed, damp location
- CCEA Chicago Plenum Approved

Electrical

- Power consumption: Per specification based on LED configuration
- Input Voltage: 120-277V universal driver
- Ambient temperature: 100 °F maximum
- Integral electronic drivers
- Integral wiring buss between fixture sections
- Drivers with full dimming range at any output choice
- 1% Dimming: 0-10V standard (included), consult factory for other options

Mounting

- Mounting brackets provided. Contact factory for alternate mounting

Ceiling Cutout

- Refer to appropriate Perimeter cut sheet for dimensions per trim type

Options (Consult factory)

- Occupancy sensor, daylight control module

LED Specifications/Photometry:

Refer to appropriate LED Perimeter Slot cut sheet

- * Factory to confirm availability
- ** Specify wireless system
- † For high performance dimming below 125 lm/ft, contact factory



STARFIRE LIGHTING, INC.
7 Donna Drive, Wood-Ridge, NJ 07075
starfirelighting.com

P 201.438.9540
F 201.438.9541

All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC., reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.