




# LED Linear Open Aperture Wall Grazer

## VWG3 LED

### LED Light Source

Premium LED boards on tight density, ultra high efficiency mid-power LEDs

- Choice of lumen output levels:
  - S:** Standard
  - H:** High
  - M:** Maximum
  - C:** Custom (from 250 - 850 Lm/Ft)
- LED Efficiency: Up to 160 Lm/Wt at Maximum output and 180 Lm/Wt at Standard power
- L70: 50,000+ hours at Maximum output
- 2700K, 3000K, 3500K and 4000K
- CRI: 80+ or 90+
- Color Consistency: Equal or better than 3 SCDM with chip mixing
- UL Listed
- 5 year limited warranty\*

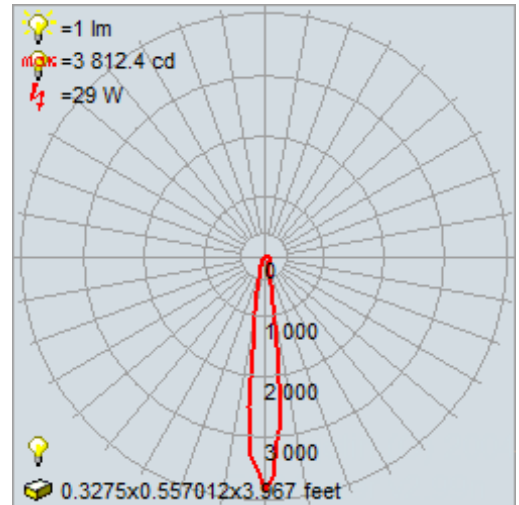

### Fixture Efficacy

Output Setting	Lm/Ft	4000K		3500K		3000K		2700K	
		Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt	Wt/Ft	Lm/Wt
<b>S</b> Standard	<b>400</b>	3.4	117.6	3.47	115.3	3.62	110.6	4.07	98.2
<b>H</b> High	<b>700</b>	6.3	111.2	6.43	108.8	6.72	104.2	7.76	90.2
<b>M</b> Maximum	<b>845</b>	7.82	108.1	7.99	105.7	8.36	101.1	9.79	86.3

Performance for nominal 4 foot length or greater (Std. 6ft)

### Ceiling Cutout

Trim Type	Wall to:	Dimensions
<b>Plaster Flange Above</b>	Sheetrock Edge	4 1/8"
<b>Plaster Flange Below</b>	Sheetrock Edge	3 15/16"
<b>1/2" Flange Trim</b>	Tile Edge	3 15/16"
<b>9/16" Grid Trim</b>	Grid Center	4 3/32"
<b>15/16" Grid Trim</b>	Grid Center	4 9/32"
<b>No Trim</b>	Sheetrock Edge	4 1/8"

Refer to Ceiling/Trim Detail: Page 1

\* See Starfire website for Product Limited Warranty



STARFIRE LIGHTING, INC.  
7 Donna Drive, Wood-Ridge, NJ 07075  
starfirelighting.com

P 201.438.9540  
F 201.438.9541

All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC., reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.