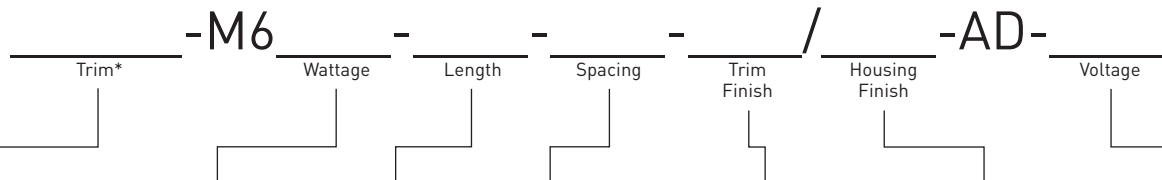
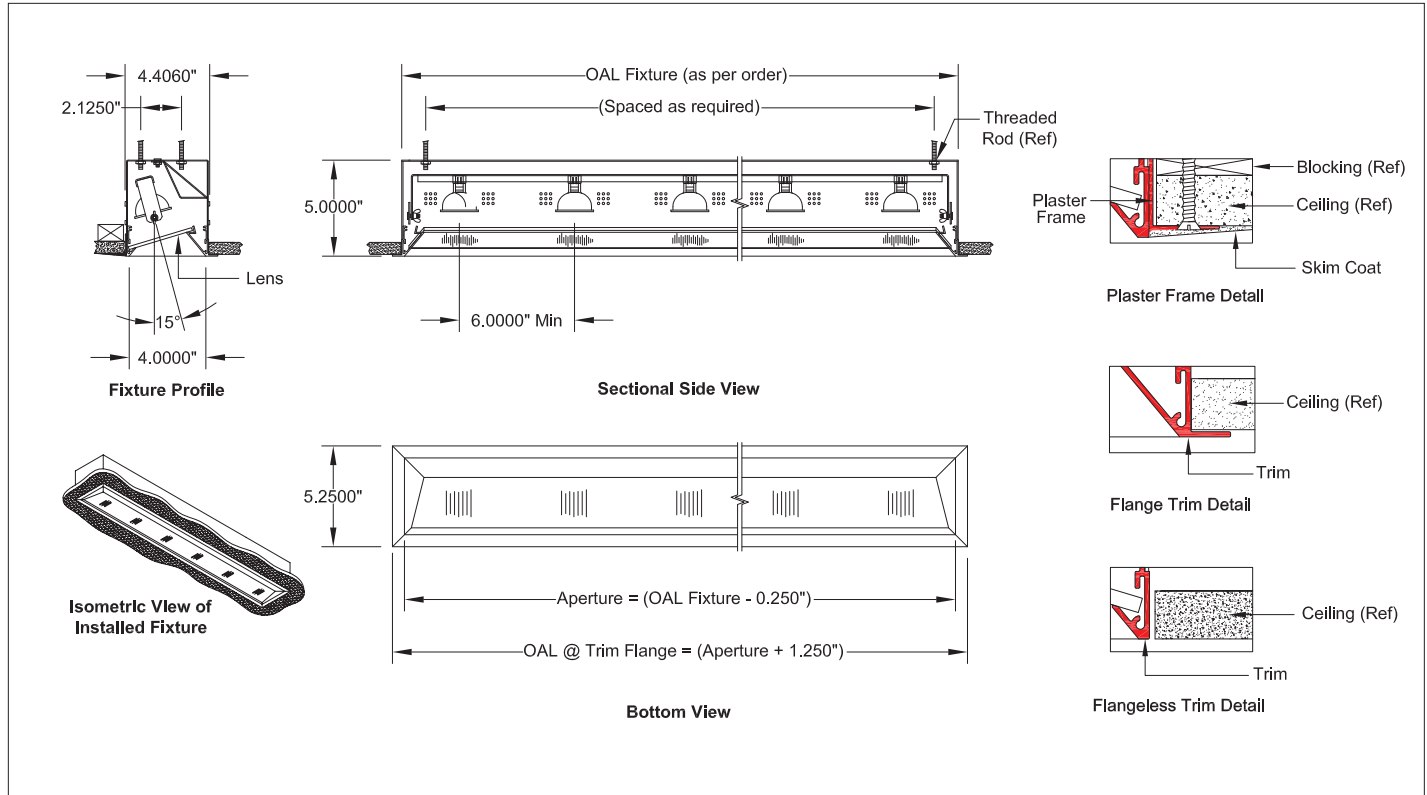


## Linear Adjustable Wallwash



Trim Type*	Wattage	Length	Spacing	Trim Finish	Housing Finish	Voltage
<input type="checkbox"/> VLWP Plaster	<input type="checkbox"/> 20	Specify Length (in inches)	<input type="checkbox"/> 6" Minimum	<input type="checkbox"/> W White	<input type="checkbox"/> W White	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VLWF Flange	<input type="checkbox"/> 37		<input type="checkbox"/> Custom (Specify)	<input type="checkbox"/> B Black	<input type="checkbox"/> B Black	<input type="checkbox"/> 2 (277V)
<input type="checkbox"/> VLWX Flangeless	<input type="checkbox"/> 50			<input type="checkbox"/> C Custom	<input type="checkbox"/> C Custom	

\* P=Plaster: For use with Drywall and Fellert.

F=Flange: Suitable for all ceiling types.

X=Flangeless: For use with Donn Finline 9/16, Armstrong Bolt Slot 9/16, TechZone 9/16 Superfine, TechZone 15/16 Prelude, TechZone 9/16 Interlude, Decoustic and Wood.

### Description

Linear adjustable MR16 wallwash with full diffuser. Adjustable lampholders aim in unison. Plaster, flanged or flangeless trim.

### Features

- Standard Lens: Skytex linear spread lens.
- Lengths made-to-measure
- Lampholders are adjustable from 0°- 15°.
- Available as a surface or pendant fixture, consult factory.

### Fixture Specifications

Finish: White (std), custom available.  
Weight: Approx. 6 lbs. per linear foot.  
Ceiling Cutout: (Spec)"L x 4.5"W

### Electrical

- Power Consumption: 50 watts per lamp.
- Ambient temperature 100 °F. maximum.
- Remote magnetic transformers, thermally protected.

### Mounting

- Universal mounting brackets included.
- Contact factory for special ceiling conditions.

### Options (Consult factory)

- Lenses: Page 2

Photometry: Consult factory











All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

VLW

Job Name:

Fixture Type:

### Lens Options

	Lenses		Cat. No.
<input type="checkbox"/>		Solite Spread Lens	SO
<input type="checkbox"/>		Frosted Solite Spread Lens	FS
<input type="checkbox"/>		Prismatic Spread Lens	PR
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FP
<input type="checkbox"/>		Skytex Linear Spread Lens	SK
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FK
<input type="checkbox"/>		Fresnel* Lens	FN
<input type="checkbox"/>		Frosted Fresnel* Lens	FF

\* For Fresnel lenses, fixture must be in 6" increments.

For other lens options, consult factory.