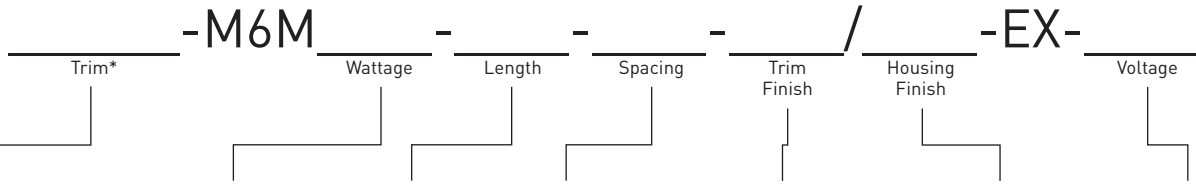
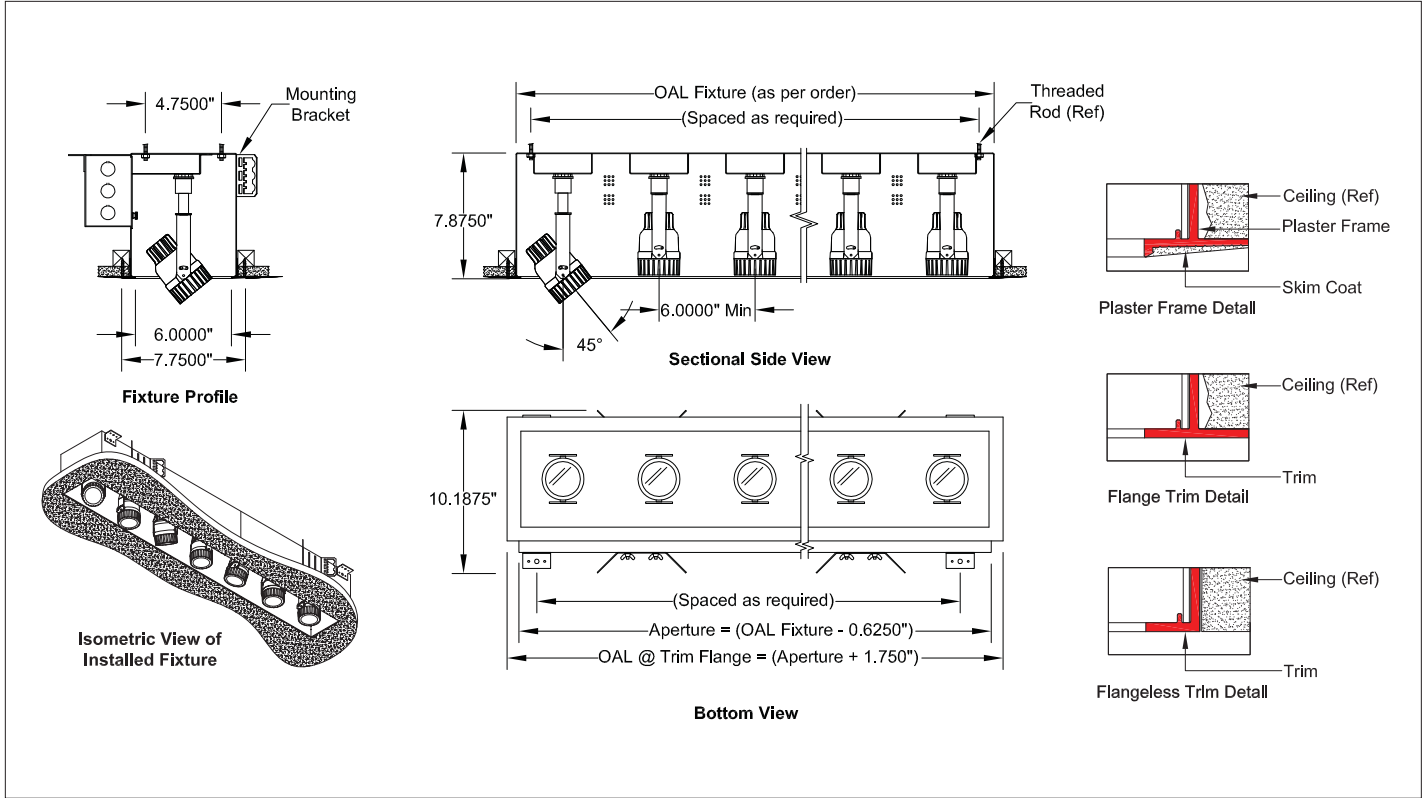


Linear Accentlight, Open Aperture



Trim Type*	Wattage	Length	Spacing	Trim Finish	Housing Finish	Voltage
<input type="checkbox"/> VLAP Plaster	<input type="checkbox"/> 20	Specify Length (in inches)	<input type="checkbox"/> 6" Minimum	<input type="checkbox"/> W White	<input type="checkbox"/> W White	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> VLAF Flange	<input type="checkbox"/> 39		<input type="checkbox"/> Custom (Specify)	<input type="checkbox"/> B Black	<input type="checkbox"/> B Black	<input type="checkbox"/> 2 (277V)
<input type="checkbox"/> VLAX Flangeless				<input type="checkbox"/> C Custom	<input type="checkbox"/> C Custom	

* P=Plaster: For use with Drywall and Fellert.
 F=Flange: Suitable for all ceiling types.
 X=Flangeless: For use with Donn Finline 9/16, Armstrong Bolt Slot 9/16, TechZone 9/16 Superfine, TechZone 15/16 Prelude, TechZone 9/16 Interlude, Decoustic and Wood.

Description
 Linear MR16 metal halide open aperture accent fixture. Adjustable and extendable lampholders extend 1.25" below aperture. Plaster, flanged or flangeless trim.

Features
 - Lengths made-to-measure
 - Below ceiling access to transformer and wiring.
 - Lampholders are adjustable from 0°-45°.

Fixture Specifications
 Finish: Black (std), custom available.
 Weight: Approx. 13 lbs./ft.

Electrical
 - Power Consumption: 39 watts per lamp.
 - Ambient temperature 100 °F. maximum.
 - Integral electronic ballasts, thermally protected.
 - Through branch wiring capable.

Mounting
 - Universal mounting brackets included.
 - Contact factory for special ceiling conditions.

Options (Consult factory)
 - Lenses: Page 2
Photometry: Consult factory




















VLA

Job Name:

Fixture Type:

Lens Options

	Accessories/Lenses		Cat. No.
<input type="checkbox"/>		Snoot	SNM6
<input type="checkbox"/>		Cross Blade Baffle	XBM6
<input type="checkbox"/>		Hexagonal Louver	HXM6
<input type="checkbox"/>		Solite Spread Lens	SOM6
<input type="checkbox"/>		Frosted Solite Spread Lens	FSM6
<input type="checkbox"/>		Prismatic Spread Lens	PRM6
<input type="checkbox"/>		Frosted Prismatic Spread Lens	FPM6
<input type="checkbox"/>		Skytex Linear Spread Lens	SKM6
<input type="checkbox"/>		Frosted Skytex Linear Spread Lens	FKM6
<input type="checkbox"/>		Flash Opal Lens	FOM6
<input type="checkbox"/>		Optivex UV Lens	UVM6
<input type="checkbox"/>		Frosted Clear Lens	FCM6
<input type="checkbox"/>		Red Filter Lens	RLM6
<input type="checkbox"/>		Green Filter Lens	GLM6
<input type="checkbox"/>		Blue Filter Lens	BLM6
<input type="checkbox"/>		Amber Filter Lens	ALM6
<input type="checkbox"/>		Dichroic Filter Lens	DLM6

For other accessory/lens options, consult factory.