


## Linear Surface Mount Fixture, Flush Snap-in Lens

T5

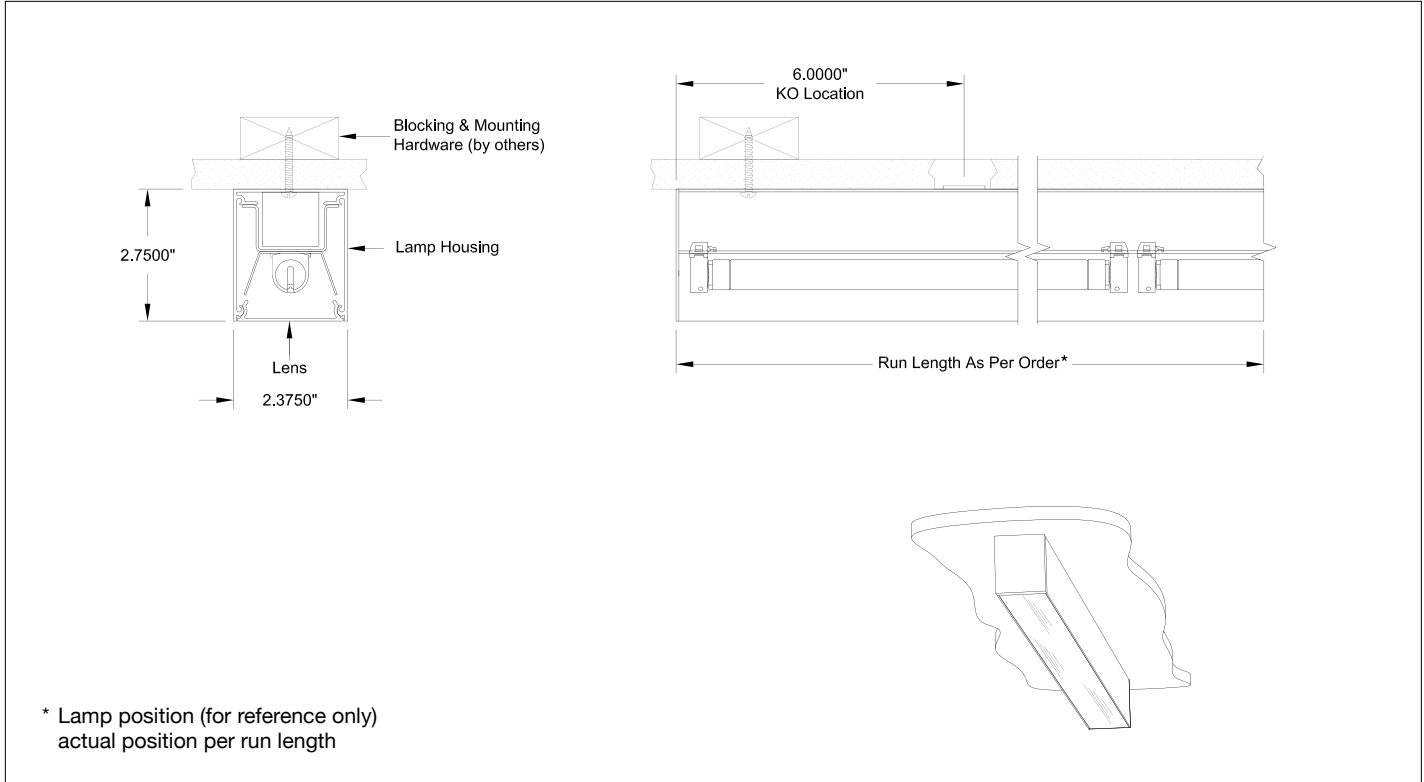

### SD2-1T - W-

Fluor Lamp Wattage      Ballast      Length      Voltage

Fluor Wattage	Ballast (Specify below)	Length (Nominal)		Voltage
See Configurations (Page 2)	<input type="checkbox"/> E (Electronic) Std. <input type="checkbox"/> D (Dimming) †	<input type="checkbox"/> 24" <input type="checkbox"/> 36" <input type="checkbox"/> 48" <input type="checkbox"/> 60"	<input type="checkbox"/> 72" <input type="checkbox"/> 84" <input type="checkbox"/> 96" <input type="checkbox"/> Custom (specify)	<input type="checkbox"/> 1 (120V) <input type="checkbox"/> 2 (277V)
	† Specify Ballast (required)			

#### Description

Linear fluorescent surface mount fixture with flush snap-in lens. Single T5 lamp in cross section.

#### Features

- Standard Lens: Frosted acrylic
- Fixtures fabricated to any length (Refer to Page 2)
- Custom run length configurations with fully illuminated corners
- Access to ballast and wiring from bottom of fixture

#### Fixture Specifications

Finish: White (std), custom available  
Weight: Approx. 3 lbs. per linear foot

#### Electrical

- Ambient temperature 100 °F. maximum
- Integral electronic ballast(s), thermally protected
- Through branch wiring capable

#### Mounting

- Contact factory for special conditions

#### Options (Consult factory)

- Occupancy sensor, daylight control module and EM pack

Photometry: Consult factory



All designs and scale drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without the expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

# Single Lamp Configurations

T5









## SD2

Job Name:

Fixture Type:

- 1 - Choose fixture configuration
- 2 - Select desired fluorescent lamp wattage

Custom configurations upon request.

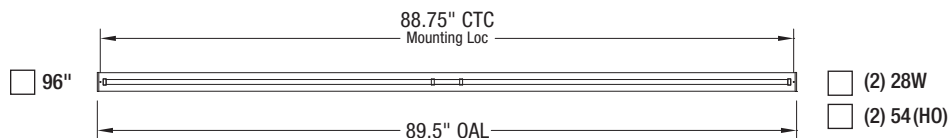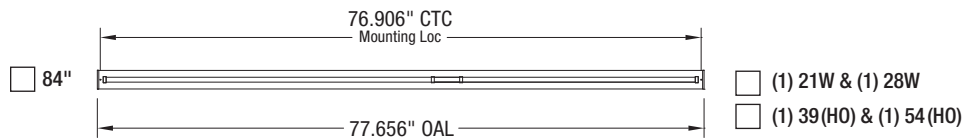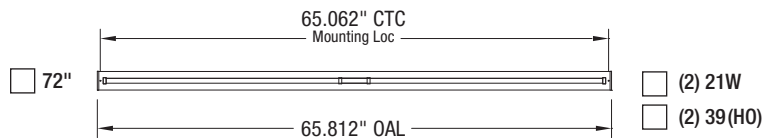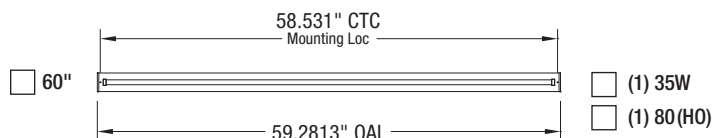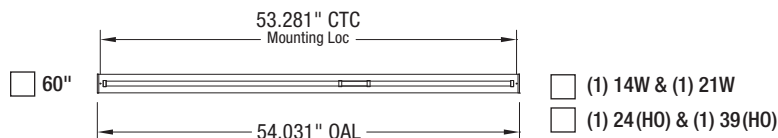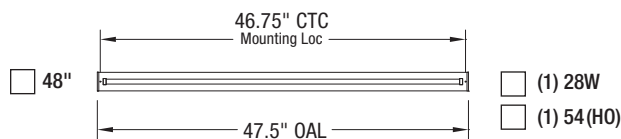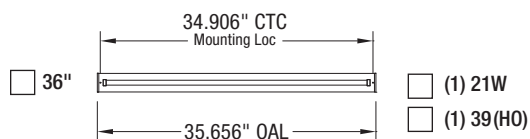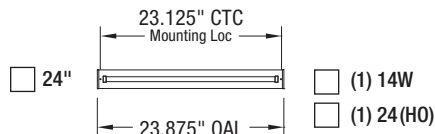

Starfire's patent pending EvenGlow™ system eliminates lamp/socket imaging and bright spots.