

# T2 & T5 Integrated ADA Cove

Unparalleled in scale, function and design



INDIRECT  
DIRECT/INDIRECT  
CUSTOM

LINEAR LIGHTING

# Tru-Lux Decorative



# Tru-Lux Decorative Series

LINEAR LIGHTING

**TRU-LUX™ DECORATIVE DELIVERS UNIFORM, HIGH OUTPUT ILLUMINATION IN A FIXTURE OF UNPARALLELED COMPACTNESS AND SCALE.**

**TRU-LUX DECORATIVE, AVAILABLE IN CONTINUOUS RUNS.**

## Features

- ADA Compliant
- Precision Lighting Control
- Reflector Systems Indirect-(100%) or Direct / Indirect-(75% / 25%)
- Integral Electronic Ballast
- Standard or Custom Fixture Lengths




TRU-LUX Decorative fixtures are UL listed.  
All electrical components are UL recognized.


Decorative Fixtures

COVE / SCONCE



530 SHOWN WITH T2 LAMP

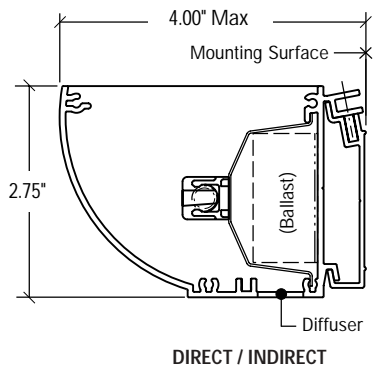



PERSPECTIVE VIEW

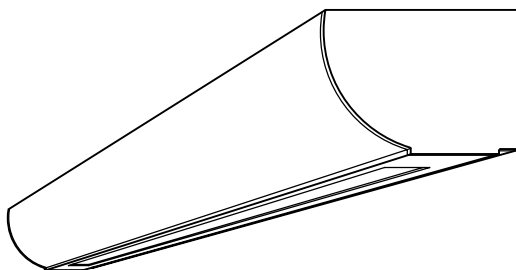

520 SHOWN WITH T5 LAMP

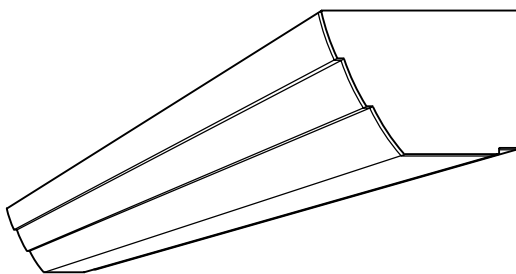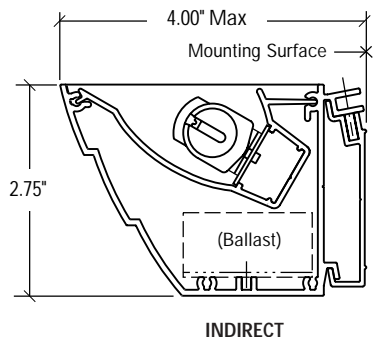

510 SHOWN WITH T2 LAMP

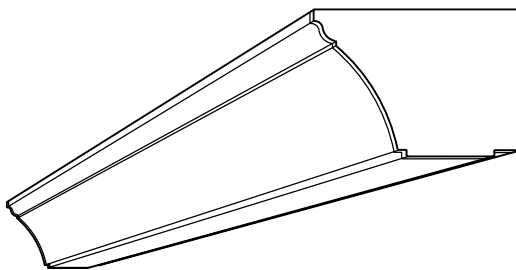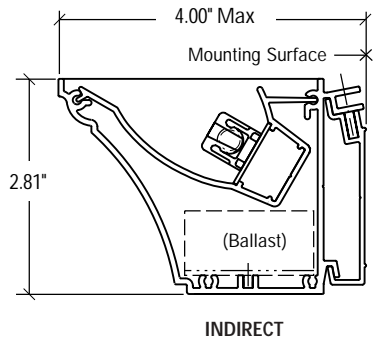



500 SHOWN WITH T2 LAMP

WORKSTATION FIXTURE

HIGH INTENSITY TASK ILLUMINATION.  
ELIMINATES VEILING REFLECTIONS & GLARE.  
PROFILE JUST OVER ONE INCH TALL.

OPTIONS:

- One or two lamp configurations
- Low glare distribution lens
- Convenience outlet (optional)
- Power switch (optional)
- Integral ballast

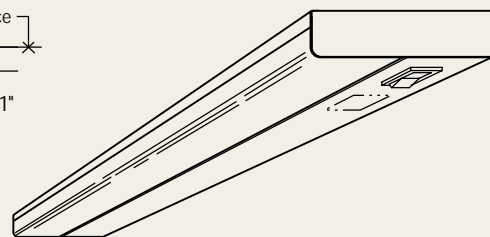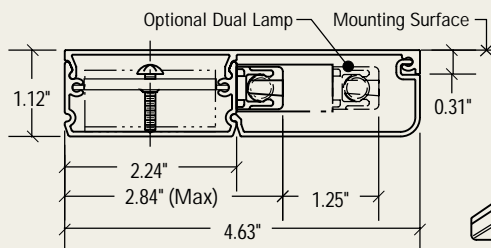

T2 Lamp

OSRAM SYLVANIA, PHILIPS

- WATTAGE: 11, 13
- LAMP LIFE: 10,000 hours
- CRI: 82
- COLOR TEMPERATURE: 3000°K, 4000°K

T5 Lamp

OSRAM SYLVANIA, PHILIPS

- WATTAGE: STANDARD: 14, 21, 28, 35; HIGH OUTPUT: 24, 39, 54, 80
- LAMP LIFE: 16,000 hours
- CRI: 82
- COLOR TEMPERATURE: 3000°K, 3500°K, 4000°K

Electronic Ballast

Integral safety shutdown circuit

- T2 120 or 277 volt
- T5 120 or 277 volt

# Specifications

## LINEAR LIGHTING


### Options

Fixture Type  
Single Lamp Module  
Continuous Run

Single, Double or  
Staggered Lamps

Electronic Ballast  
Integral only

K.O. Location

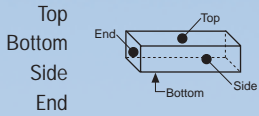

### Lamp Data

including socket

#### T2 Lamp

WATTAGE	NOM. LENGTH	INITIAL LUMENS
11W	17"	680
13W	21"	860

#### T5 Lamp Standard

WATTAGE	NOM. LENGTH	INITIAL LUMENS
14W	22"	1350
21W	34"	2100
28W	46"	2900
35W	58"	3650

#### T5 Lamp High Output

WATTAGE	NOM. LENGTH	INITIAL LUMENS
24W	22"	2000
39W	34"	3500
54W	46"	5000
80W	58"	7000

Typical Specification Number

<b>500</b>	-	<b>13T2</b>	-	<b>21</b>	-	<b>BR</b>	-	<b>120</b>
PROFILE		WATTAGE		FIX LENGTH		FINISH		VOLTAGE

### T2 Fixtures

PROFILE	WATTAGE	FIX LENGTH	FINISH	VOLTAGE
530	11 T2	17" (11W)	Chrome PC	120
520	13 T2	21" (13W)	Brass BR	277
510			White WH	
500		Run length: Multiples of lamp length	Custom (Specify)	

### T5 Fixtures

PROFILE	WATTAGE	FIX LENGTH	FINISH	VOLTAGE
530	Standard High Output	24" (14 / 24W)	Chrome PC	120
520	14 T5 24 T5	36" (21 / 39W)	Brass BR	277
510	21 T5 39 T5	48" (28 / 54W)	White WH	
500	28 T5 54 T5 35 T5 80 T5	60" (35 / 80W)	Custom (Specify)	
		Run length: Multiples of lamp length		

All fixture lengths are nominal.